
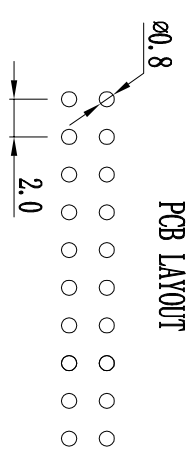

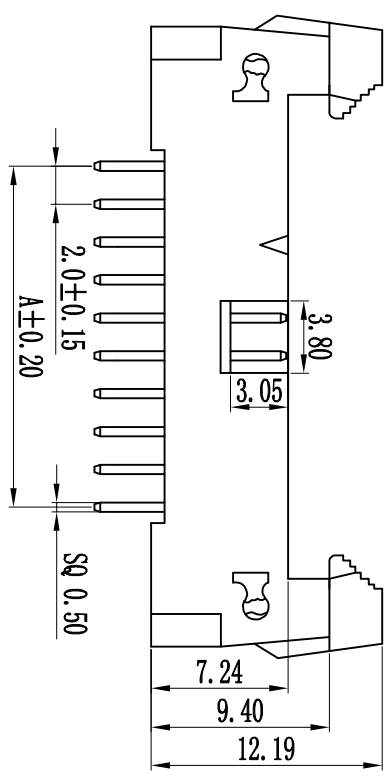


Pin数	尺寸A
2x6	10.00
2x8	14.00
2x10	18.00
2x12	22.00
2x14	26.00
2x16	30.00
2x18	34.00
2x20	38.00
2x22	42.00
2x24	46.00
2x26	50.00
2x28	54.00
2x30	58.00
2x32	62.00
2x34	66.00
2x36	70.00
2x38	74.00
2x40	78.00
2x42	82.00
2x44	86.00
2x46	90.00
2x48	94.00
2x50	98.00
2x52	102.00
2x54	106.00
2x56	110.00
2x58	114.00
2x60	118.00

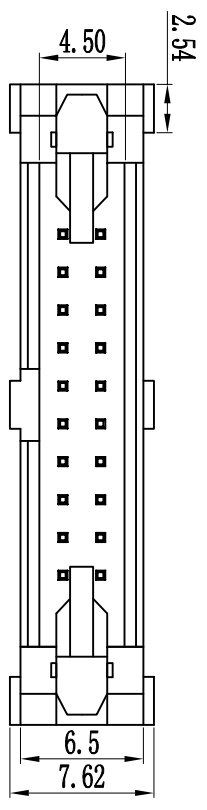

技术规范:
 额定电流 : 1.5AMP
 适用温度 : -40°C to +105°C
 接触电阻 : 20mΩ Max
 绝缘电阻 : 1000MΩ Min
 耐电压 : AC 500V
 绝缘材料 : Polyester (UL94V-0)
 Standard: PBT
 端子材质 : Brass
 电镀规范 : Au or Sn Over 50u" Ni

插接系列	间距	规格	双排	单排	Pin数	电镀	材质	角度	端子	备注
c-1.0mm	1-单排	1-单排	2-双排	1-单排	1" 40P/50P	A-10"	A-10"	S-180°	12.5mm间距25	0-3.0
b-1.0mm	2-双排	2-双排	3-三排	2-双排	2" 40P/50P	B-30"	B-30"	R-90°	11.0mm间距18	1-3.0/3.0(双排)
c-1.27mm	3-三排	3-三排	4-四排	3-三排	3" 40P/50P	C-50"	C-70"	R-90°	12.2mm间距22	2-3.0/3.0(双排)
d-2.0mm	4-四排	4-四排		4-四排	4" 40P/50P	D-70"	D-70"	L-150°	100-非焊接端子	2-2.8/2.8(双排)
e-2.5mm					5" 40P/50P	E-100"	E-100"	L-150°	100-非焊接端子	4-2.6/2.6(双排)
f-3.0mm					6" 40P/50P	F-120"	F-120"	S-直插	100-非焊接端子	其它另做说明
h-5.0mm					8-单排	H-单排	H-单排		100-非焊接端子	

注: 长插时以插针计

STG
 上海狮拓电子科技有限公司

TOLERANCE:
 X. ±XXX
 X. ±0.20
 XX ±0.10
 ANG.

产品名称:
 产品料号:
 THIRD ANGLE PROJECTION

客户确认
 日期: _____
 日期: _____
 日期: _____
 日期: _____

2.00mm间距牛角, 180°, 立高7.24mm 防ANP
 Spec: 2.00mm Ejector Header, Dual Row, 180°
 Positions: 2X6"2X40
 Plastics Height: 7.24mm