


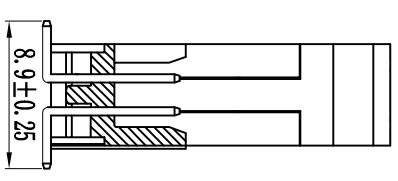
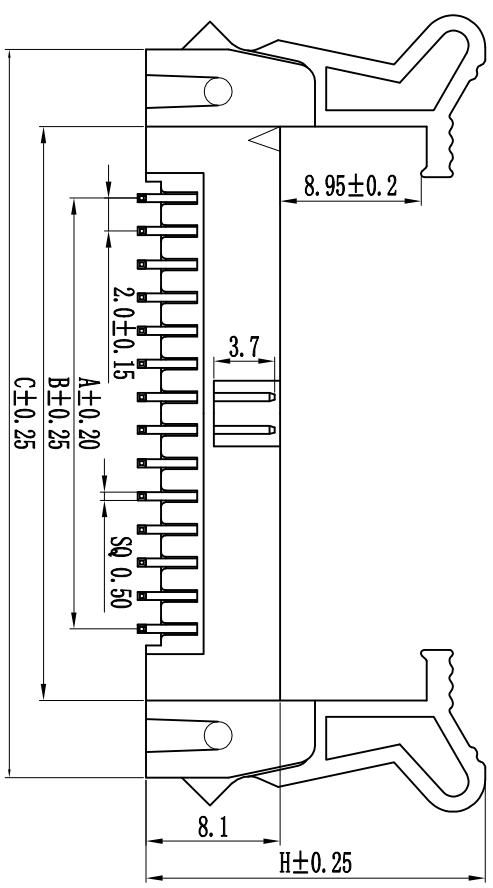


1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

Pin数	尺寸A	尺寸B	尺寸C
2X6	10.00	18.30	27.90
2X8	14.00	22.30	31.90
2X10	18.00	26.30	35.90
2X12	22.00	30.30	39.90
2X14	26.00	34.30	43.90
2X16	30.00	38.30	47.90
2X18	34.00	42.30	51.90
2X20	38.00	46.30	55.90
2X22	42.00	50.30	59.90
2X24	46.00	54.30	63.90
2X26	50.00	58.30	67.90
2X28	54.00	62.30	71.90
2X30	58.00	66.30	75.90
2X32	62.00	70.30	79.90
2X34	66.00	74.30	83.90
2X36	70.00	78.30	87.90
2X38	74.00	82.30	91.90
2X40	78.00	86.30	95.90
2X42	82.00	90.30	99.90
2X44	86.00	94.30	103.90
2X46	90.00	98.30	107.90
2X48	94.00	102.30	111.90
2X50	98.00	106.30	115.90
2X52	102.00	110.30	119.90
2X54	106.00	114.30	123.90
2X56	110.00	118.30	127.90
2X58	114.00	122.30	131.90
2X60	118.00	126.30	135.90

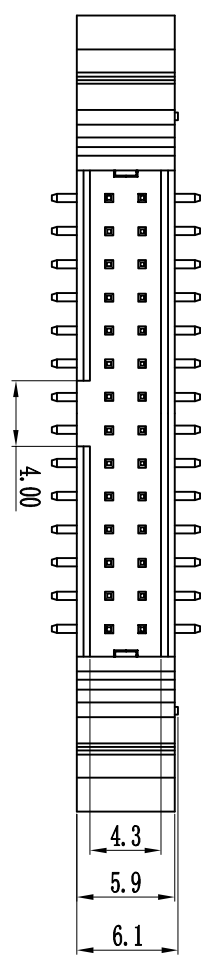


SHORT LATCH



LONG LATCH

技术规范:

- 额定电流 : 1.5AMP
- 适用温度 : -40°C to +105°C
- 接触电阻 : 20mΩ Max
- 绝缘电阻 : 1000MΩ Min
- 耐电压 : AC 500V
- 绝缘材料 : Polyester (UL94V-0)
- Standard: PBT
- 端子材料 : Brass
- 电镀规范 : Au or Sn Over 50u" Ni

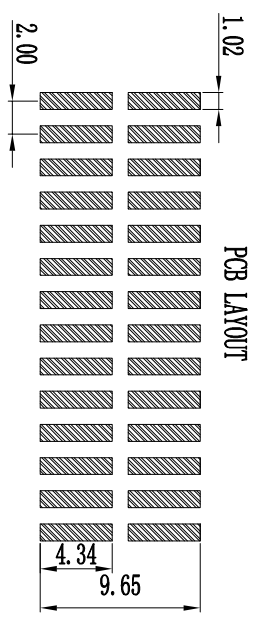

F		a-10-1-2-5p-a-a-s-D-0	
封装系列	间距	层数	焊盘
a-10	2.00mm	1-单排	1.70mm
b-10	2.00mm	2-双排	2.40mm
c-10	2.00mm	3-三排	3.10mm
d-10	2.00mm	4-四排	3.80mm
e-10	2.00mm		4.50mm
f-10	2.00mm		5.20mm
g-10	2.00mm		5.90mm
h-10	2.00mm		6.60mm



上海狮拓电子科技有限公司

TOLERANCE:

X	±0.05
XX	±0.10
ANG.	

产品名称:  
产品料号:

THIRD ANGLE PROJECTION

客户确认

姓名: \_\_\_\_\_ 日期: \_\_\_\_\_

日期: \_\_\_\_\_

日期: \_\_\_\_\_

日期: \_\_\_\_\_

2.00mm 间距牛角, SMT, 立高8.1mm  
Spec: 2.00mm Ejector Header, Dual Row, SMT  
Positions: 2X6~2X40  
Plastics Height: 8.1mm