



# ROHS

页码	文件编号
1 OF 1	ST0-C0-058

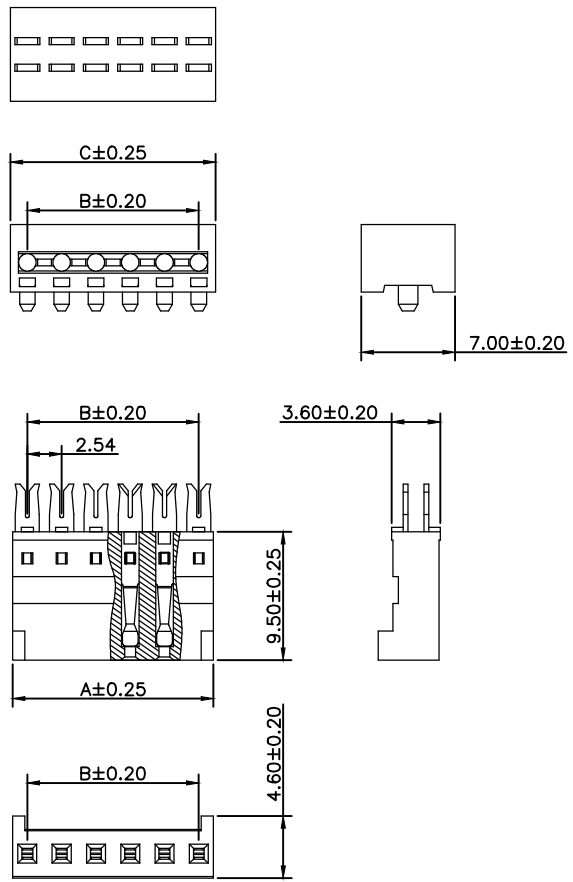

- Specifications(规格) :
- Current rating(额定电流): 2A AC / DC
  - Withstanding voltage(耐压值): 500V AC/minute
  - Temperature range(工作温度): -40°C~+105°C
  - Insulation resistance(绝缘电阻): ≥1000MΩ
  - Contact resistance(接触电阻): ≤20mΩ



- IDC
- Part No. (料号): 4254IXXBKPTH01S2TP
  - Poles (PIN数): 2-24P
  - Material (材质): PBT+30% Glass Fiber (UL94V-0).
  - Pin针: Phosphorus Bronze (磷青铜)
  - Finish (电镀): Contact-Plated (接触点镀金)
  - Bottom-Nickel (底部镀镍)

4254 I XX BK PT H01 S2 TP  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ①系列
- ②类别: I-IDC类
- ③PIN数:  
单排- X X      双排- 2 \* X X
- ④颜色:  
BK - 黑色
- ⑤材质:  
6 T - PA 6 T      9 T - PA 9 T      4 6 - PA 4 6      L P  
T S - 其它
- ⑥电镀类别: G \* \* - 镀金      V \* \*H\* 镀全镀半金  
\* 0 1 - 1 U "      \* 0 2 - 2 U "      \* 0 3 - 3 U "  
\* 1 0 - 1 0 U "      \* 1 5 - 1 5 U "      \* 3 0 - 3 0 U "  
N - 镀镍 ( 3 0 - 5 0 U " )      S N - 镀亮锡 ( 7 0  
S N 1 - 镀亮锡 ( 1 2 0 U " M i n . )      S - 镀银  
S W - 镀雾锡      H S - 高温锡
- ⑦成品的件数  
S2-二件式
- ⑧空PIN位置及特殊码:  
TP- 双刺破 ( 单排)

DIM E N O S N S			
Position	A	B	C
02	4.70	2.54	5.08
03	7.24	5.08	7.62
04	9.78	7.62	10.16
05	12.32	10.16	12.70
06	14.86	12.70	15.24
07	17.40	15.24	17.78
08	19.94	17.78	20.32
09	22.48	20.32	22.86
10	25.02	22.86	25.40
11	27.56	25.40	27.94
12	30.10	27.94	30.48
*13	32.64	30.48	33.02
*14	35.18	33.02	35.56
15	37.72	35.56	38.10
16	40.26	38.10	40.64
17	42.80	40.64	43.18
18	45.34	43.18	45.72
19	47.88	45.72	48.26
20	50.42	48.26	50.80
21	52.96	50.80	53.34
22	55.50	53.34	55.88
23	58.04	55.88	58.42
24	60.58	58.42	60.96

TOLERANCE:
X. ±XXX
.X ±0.20
.XX ±0.10
ANG.

**STO** 上海狮拓电子科技有限公司

產品名稱: \_\_\_\_\_

產品料號: \_\_\_\_\_

THIRD ANGLE PROJECTION

簽名 \_\_\_\_\_

日期 \_\_\_\_\_

審核 \_\_\_\_\_

日期 \_\_\_\_\_

客戶確認

承認 \_\_\_\_\_ 日期 \_\_\_\_\_

駁回 \_\_\_\_\_ 日期 \_\_\_\_\_

4254IXXBKPTH01S2TP

2.54mm IDC Single Platoon Connector