



R O H S

页码	文件编号
1 OF 1	ST0-C0-059

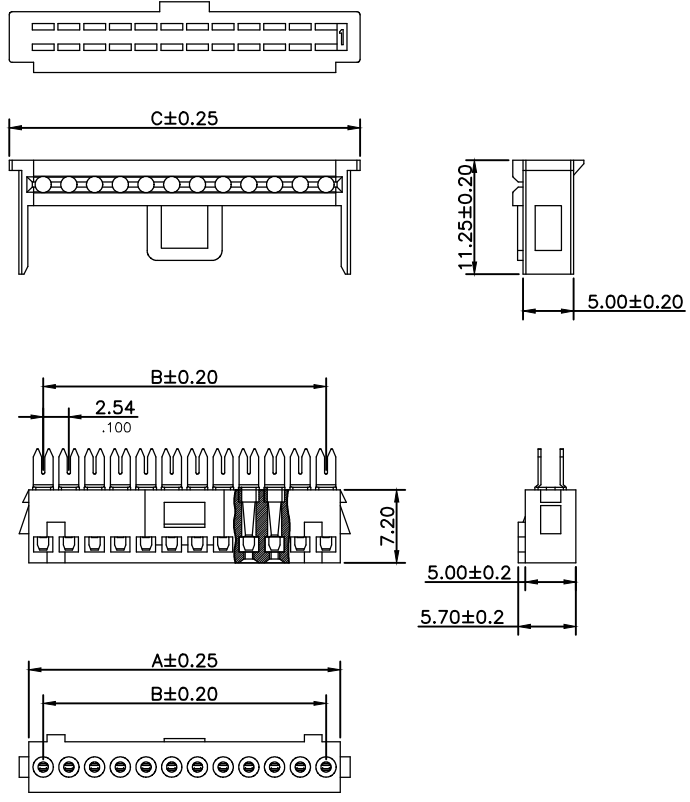

- Specifications(规格) :
- Current rating(额定电流) : 2A AC / DC
 - Withstanding voltage(耐压值) : 500V AC/minute
 - Temperature range(工作温度) : -40°C~+105°C
 - Insulation resistance(绝缘电阻) : ≥1000MΩ
 - Contact resistance(接触电阻) : ≤20mΩ

- IDC
- Part No. (料号) : 4254IXXBKPTH01OS2TP
 - Poles (PIN数) : 2-24P
 - Material (材质) : PBT+30% Glass Fiber (UL94V-0).
 - Pin针: Phosphorus Bronze (磷青铜)
 - Finish (电镀) : Contact-Plated (接触点镀金)
 - Bottom-Nickel (底部镀镍)



4254 I XX BK PT H01 O S2 TP

- ①系列
- ②类别: I-IDC类
- ③PIN数: 单排- X X 双排- 2 * X X
- ④颜色: BK - 黑色
- ⑤材质: 6 T - PA 6 T 9 T - PA 9 T 4 6 - PA 4 6 L P T S - 其它
- ⑥电镀类别: G * * - 镀金 V * *H* 镀全金 镀半金 * 0 1 - 1 U " * 0 2 - 2 U " * 0 3 - 3 U " * 1 0 - 1 0 U " * 1 5 - 1 5 U " * 3 0 - 3 0 U " N - 镀镍 (3 0 - 5 0 U ") S N - 镀亮锡 (7 0 S N 1 - 镀亮锡 (1 2 0 U " M i n .) S - 镀银 S W - 镀雾锡 H S - 高温锡
- ⑦扣位方向: I-内扣 O-外扣
- ⑧成品的件数 S2-二件式
- ⑨空 P I N 位置及特殊码: T P - 双刺破 (单排)

DIMENSIONS			
Position	A	B	C
02	9.25	2.54	5.35
03	11.79	5.08	7.89
04	14.33	7.62	10.43
05	16.87	10.16	12.97
06	19.41	12.70	15.51
07	21.95	15.24	18.05
08	24.49	17.78	20.59
09	27.03	20.32	23.13
10	29.57	22.86	25.67
11	32.11	25.40	28.21
*105	34.65	27.94	30.75
*130	37.19	30.48	33.29
140	39.73	33.02	35.83
150	42.27	35.56	38.37
16	44.81	38.10	40.91
17	47.35	40.64	43.45
18	49.89	43.18	45.99
19	52.43	45.72	48.53
20	54.97	48.26	51.07
21	57.51	50.80	53.61
22	60.05	53.34	56.15
23	62.59	55.88	58.69
24	65.13	58.42	61.23

TOLERANCE: X. ±XXX .X ±0.20 .XX ±0.10 ANG.		<h1>上海狮拓电子科技有限公司</h1>		签名 _____ 日期 _____ 审核 _____ 日期 _____	客户确认 <input type="checkbox"/> 承认 _____ 日期 _____ <input type="checkbox"/> 驳回 _____ 日期 _____	4254IXXBKPTH01OS2TP 2.54mm IDC Single Platoon Connector
		产品名稱: _____ 产品料號: _____	THIRD ANGLE PROJECTION			