


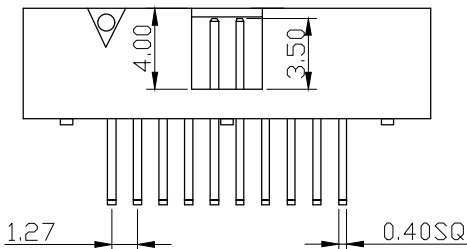


R O H S

页码	文件编号
1 OF 1	ST0-CD-071

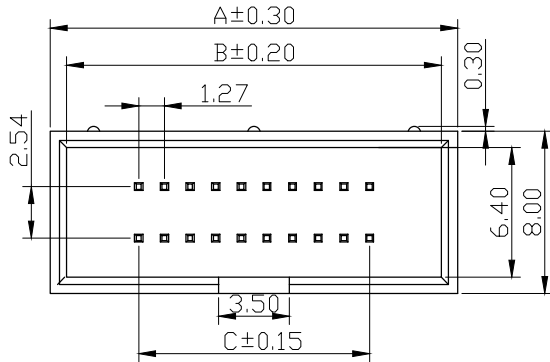

■ Specifications(规格) :

- Current rating(额定电流): 1AMP
- Withstanding voltage(耐压值): 500V AC/minute
- Operating Temperature (工作温度): -40°C~+105°C
- Insulation resistance(绝缘电阻): 1000MΩmin.at500V DC
- Contact resistance(接触电阻): 20mΩmax.at DC100mA

■ Wafer(针座)

- Part No. (料号) : 6127WRXXBKDPTV01W
- Poles (PIN数) :08-80P
- Material (材质) :Glass filled PBT UL 94V-0
Pin针: Phosphor Bronze (磷青铜)
Finish (电镀) :Whole Gold Plated over Nickel(镀全金)

6127 WR XX BK D PT V01- X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ①系列
- ②类别: W - W A F E R 类
- ③外观形态:
V - 180° R - 90°
- ④PIN数:
单排- X X 双排- 2 * X X
- ⑤颜色:
空码-本色 B K - 黑色 B R - 棕色
O R - 橙色 Y E - 黄色 G R - 绿色
P R - 紫色 G Y - 灰色 W H - 白色
B N - 咖啡色 L B - 浅蓝色 R D - 暗红色
- ⑥成型方式:
D - D I P S - S M T W - 公母连体
- ⑦材质:
6 T - P A 6 T 9 T - P A 9 T 4 6 - P A 4 6
T S - 其它
- ⑧电镀类别: G * * - 镀金 V * * - 镀全金 S - 镀银
* 0 1 - 1 U " * 0 2 - 2 U " * 0 3 - 3 U "
* 1 0 - 1 0 U " * 1 5 - 1 5 U " * 3 0 - 3 0 U "
N - 镀镍 (3 0 - 5 0 U ") S N - 镀亮锡 (5 0 - 1 2 0 U ")
S N 1 - 镀亮锡 (1 2 0 U " M i n .) S W - 镀雾锡
- ⑨空PIN位置及特殊码:
W-1.27*2.54间距

Position	A	B	C
08	12.64	11.04	3.81
10	13.91	12.31	5.08
12	15.18	13.58	6.35
14	16.45	14.85	7.62
16	17.72	16.12	8.89
20	20.26	18.66	11.43
26	24.04	22.47	15.24
30	26.61	25.01	17.78
34	29.15	27.55	20.32
40	32.96	31.36	24.13
44	35.50	33.90	26.67
50	39.31	37.71	30.48
60	45.66	44.06	36.83
64	48.20	46.60	39.37
68	50.74	49.14	41.91
80	58.36	56.76	49.53

TOLERANCE:

X. ±XXX
.X ±0.20
.XX ±0.10
ANG. ????



上海狮拓电子科技有限公司

签名 _____
日期 _____
审核 _____
日期 _____

客户确认

承认 _____ 日期 _____
 取回 _____ 日期 _____

6127WRXXBKDPTV01W
1.27x2.54 Box 90° DIP

THIRD ANGLE PROJECTION