

R O H S

页码	文件编号
1 OF 1	ST0-C0-042

■ Specifications(规格) :

- Current rating(额定电流): 1A AC / DC
- Withstanding voltage(耐压值): 500V AC/minute
- Temperature range(工作温度): -40°C~+105°C
- Insulation resistance(绝缘电阻): ≥1000MΩ
- Contact resistance(接触电阻): ≤15mΩ

■ IDC

- Part No. (料号) : 4254ISXXBKPTH01S2
- Poles(PIN数) :4-26P
- Material (材质) :PBT+30% Glass Fiber (UL94V-0).

Pin针: Bronze (青铜)


Finish (电镀) :Contact-Plated (接触点镀金)

Bottom-Nickel (底部镀镍)

4254 I S XX BK PT H01 S2
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① 系列
- ② 类别: I- IDC类
- ③ 外观形态: S-单排 D-双排
- ④ PIN数:
XX-P位
- ⑤ 颜色:
BK-黑色
- ⑥ 材质:
6T-PA6T 9T-PA9T 46-PA46 LP-LCP PT-PBT
TS-其它
- ⑦ 电镀类别:G**-镀金 V**-镀全金 H**-镀半金
*O1-1U" *O2-2U" *O3-3U" *O5-5U"
*10-10U" *15-15U" *30-30U" *50-50U"
N-镀镍(30-50U") SN-镀亮锡(70-120U")
SN1-镀亮锡(120U"Min.) S-镀银
SW-镀雾锡 HS-高温锡
- ⑧ 成品的件数
S2-二件式

Circuit	Dimension	
	A	B
04	11.01	7.61
05	13.55	10.15
06	16.09	12.69
07	18.63	15.23
08	21.17	17.77
09	23.71	20.31
10	26.25	22.85
11	28.79	25.39
12	31.33	27.93
13	33.87	30.47
14	36.41	33.01
15	38.95	35.55
16	41.49	38.09
18	46.57	43.17
20	51.65	48.25
22	56.82	53.42
24	61.80	58.50
26	66.98	63.58

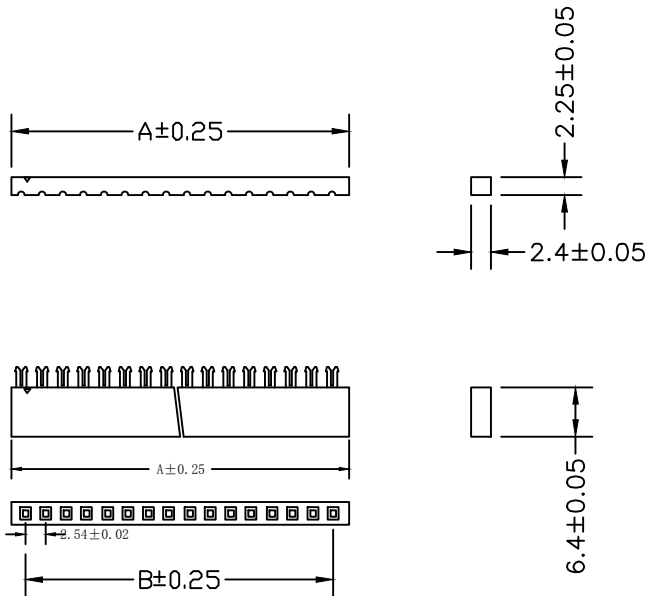

TOLERANCE:

X.	±XXX
.X	±0.20
.XX	±0.10
ANG.	



上海狮拓电子科技有限公司

產品名稱:

產品料號:

THIRD ANGLE PROJECTION



簽名 _____
日期 _____
審核 _____
日期 _____

客戶確認

承認 _____ 日期 _____
 取回 _____ 日期 _____

4254IS BKPTH01S2

XXP 2.54mm 单排二件式半金1U