


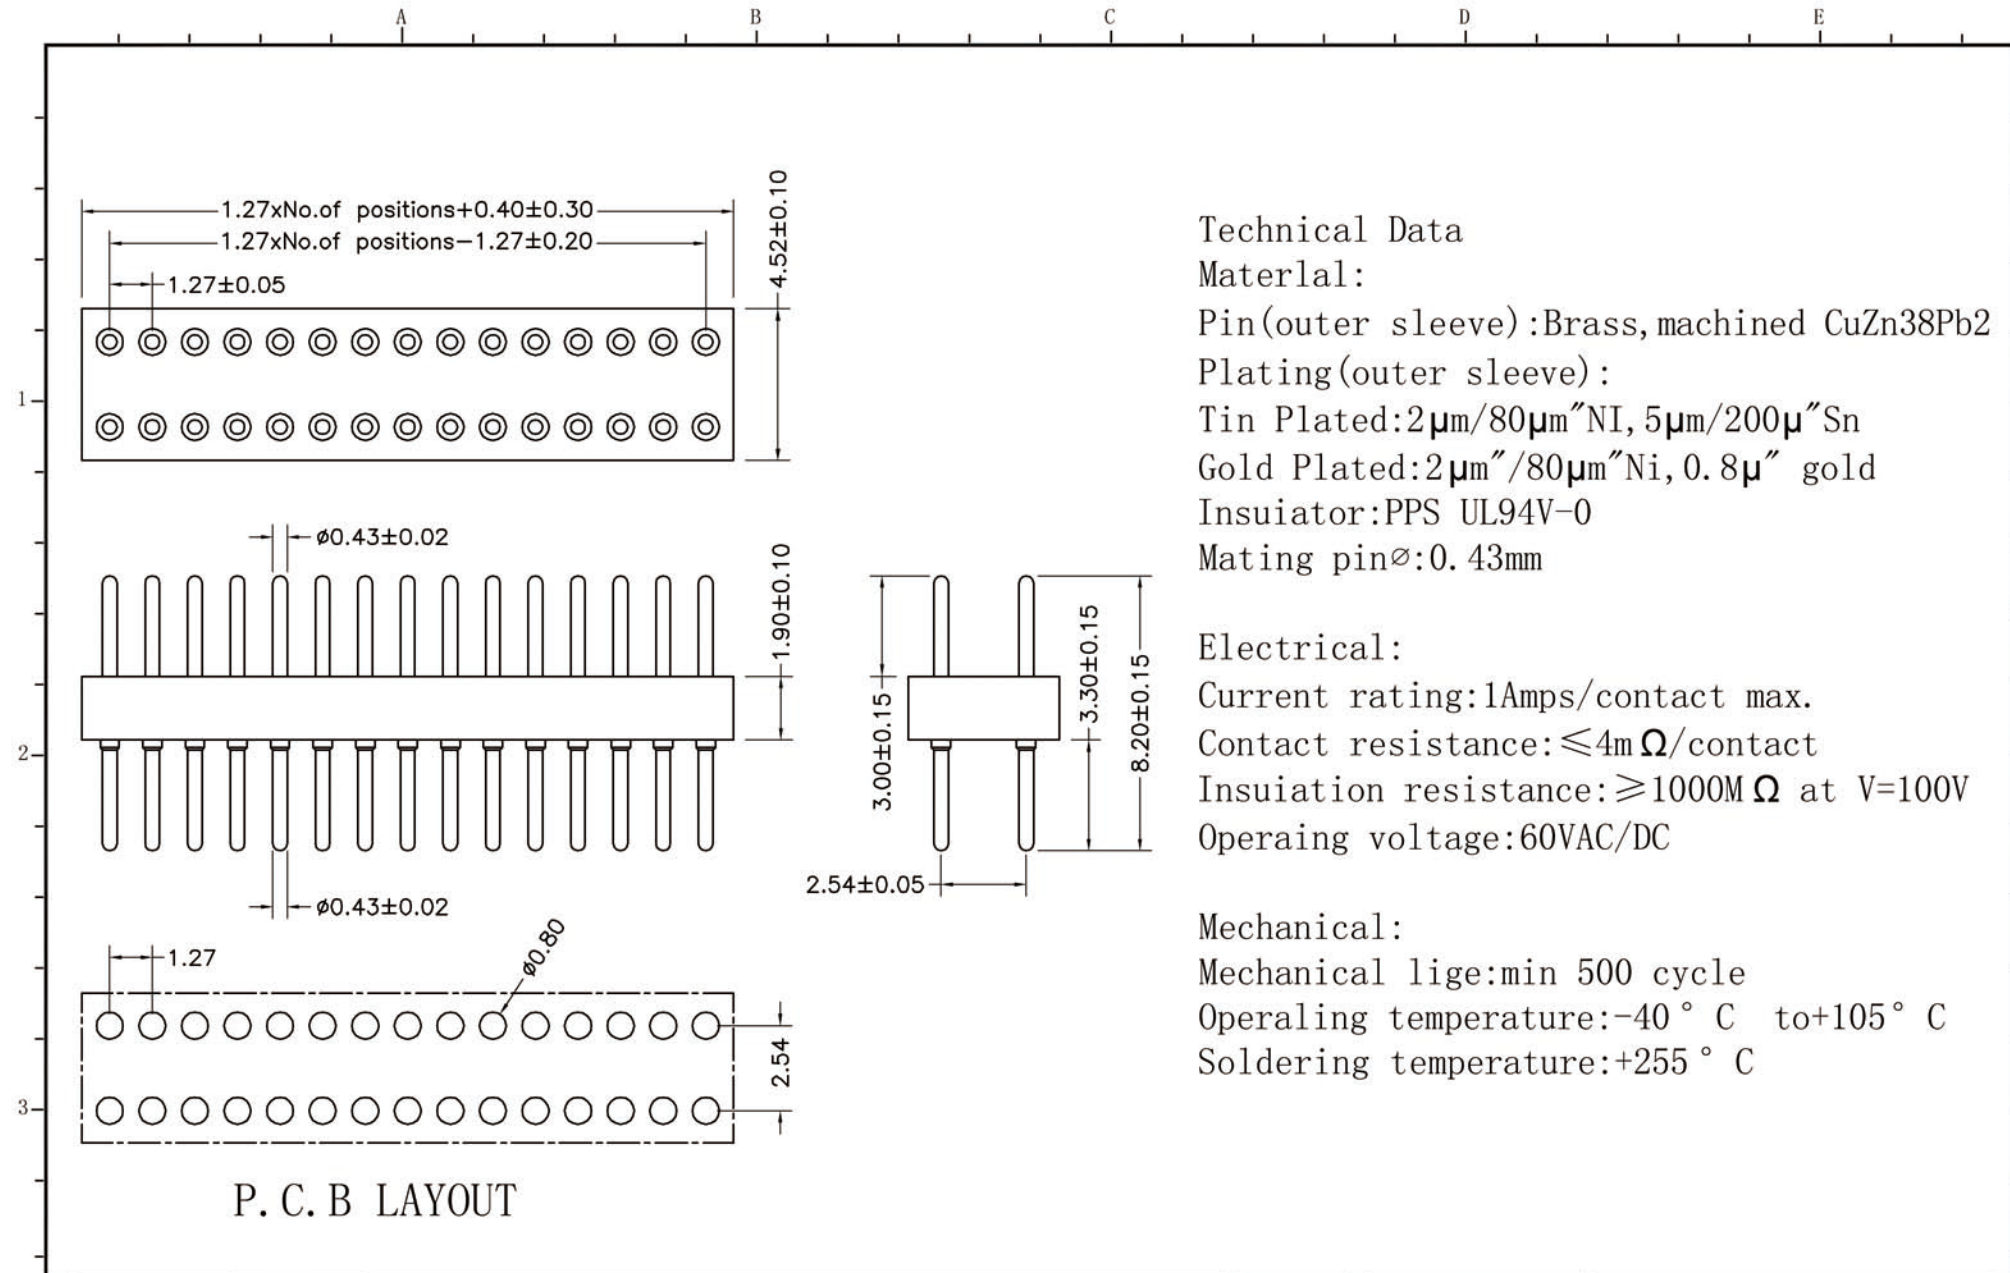

Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated: $2\mu\text{m}/80\mu\text{m}$ "NI, $5\mu\text{m}/200\mu\text{m}$ "Sn

Gold Plated: $2\mu\text{m}$ "/ $80\mu\text{m}$ "Ni, $0.8\mu\text{m}$ " gold

Insuiator:PPS UL94V-0

Mating pin ϕ :0.43mm

Electrical:

Current rating:1Amps/contact max.

Contact resistance: $\leq 4\text{m}\Omega$ /contact

Insuiation resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$

Operaing voltage:60VAC/DC

Mechanical:

Mechanical lige:min 500 cycle

Operaling temperature: -40°C to $+105^{\circ}\text{C}$

Soldering temperature: $+255^{\circ}\text{C}$

TOLERANCE:

X. $\pm\text{XXX}$

.X ± 0.20

.XX ± 0.10

ANG.



產品名稱:

產品料號:

上海狮拓电子科技有限公司

THIRD ANGLE PROJECTION



簽名 _____

日期 _____

審核 _____

日期 _____

客戶確認

☐ 承認 _____ 日期 _____

☐ 駁回 _____ 日期 _____

STOA2-DXXXX0820A-2