


A

B


C

D



E

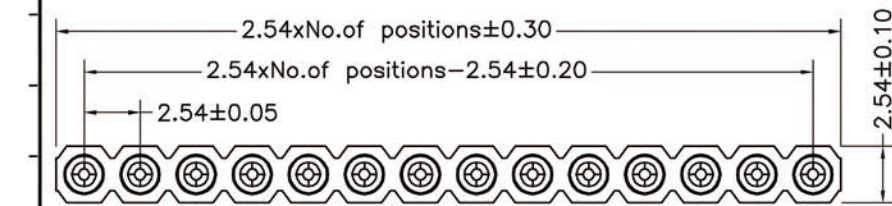

1

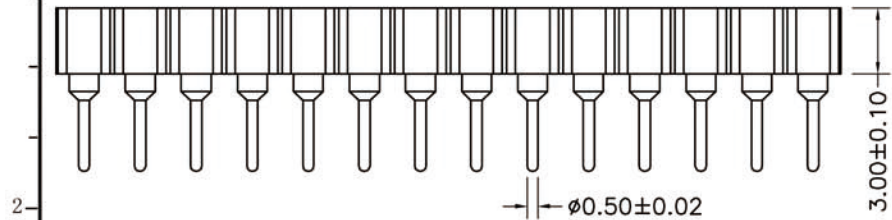

2



P. C. B LAYOUT

3

Technical Data

Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated:2 μ m/80 μ m"NI, 5 μ m/200 μ "SnGold Plated:2 μ m"/80 μ m"Ni, 0.8 μ " goldPlating(Contact):2 μ m/80 μ "NI, gold or Tin plated

Insuiator:PPS UL94V-0

Cllp(Contact 4 Flnger):Beryllium copper,heat teated

Electrical:

Current rating:3Amps/contact max.

Contact resistance: $\leq 4m\Omega$ /contactInsuiation resistance: $\geq 1000M\Omega$ at V=100V

Operaing voitage:60VAC/DC

Mechanical:

Average Insertion force with steel pin of $\varnothing 0.432$:<250gAverage withdrawal force with steel pin of $\varnothing 0.432$:>70g

Mechanical lige cycle:min 200

Operaling temperature:-40° C to+105° C

Soldering temperature:+255° C

TOLERANCE:

X. $\pm XXX$.X ± 0.20 .XX ± 0.10

ANG.



上海狮拓电子科技有限公司

產品名稱:

產品料號:

THIRD ANGLE PROJECTION



簽名 _____

日期 _____

審核 _____

日期 _____

客戶確認

☐ 承認 _____ 日期 _____☐ 駁回 _____ 日期 _____

STOD1-DXXXXXX0740B-1