

A


B

C



D

E


1

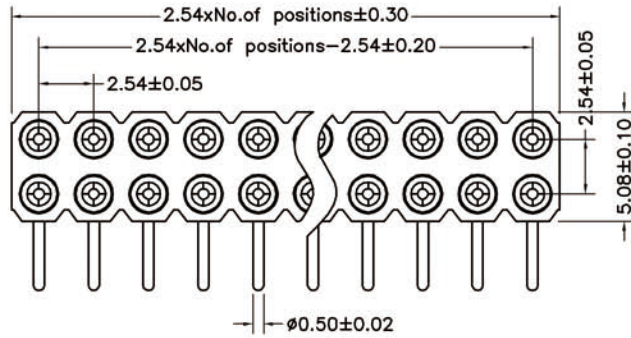

2

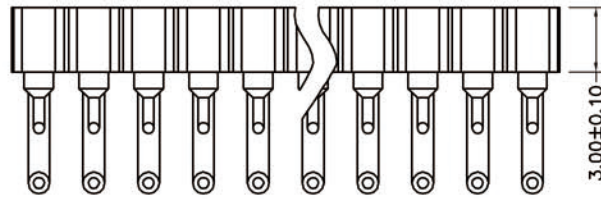

3

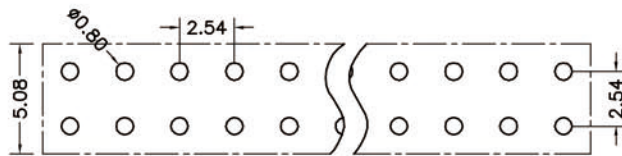

P. C. B LAYOUT

## Technical Data

## Material:

Pin(outer sleeve):Brass,machined CuZn38Pb2

Plating(outer sleeve):

Tin Plated:2 $\mu$ m/80 $\mu$ m<sup>2</sup>NI, 5 $\mu$ m/200 $\mu$ m<sup>2</sup>SnGold Plated:2 $\mu$ m<sup>2</sup>/80 $\mu$ m<sup>2</sup>Ni, 0.8 $\mu$ m<sup>2</sup> goldPlating(Contact ):2 $\mu$ m/80 $\mu$ m<sup>2</sup>NI, gold or Tin plated

Insulator:PPS UL94V-0

Clp(Contact 4 Flnger):Beryllium copper,heat teated

## Electrical:

Current rating:3Amps/contact max.

Contact resistance: $\leq 4m\Omega$ /contactInsulation resistance: $\geq 1000M\Omega$  at V=100V

Operaing voltage:60VAC/DC

## Mechanical:

Average Insertion force with steel pin of  $\phi 0.43$ :<250gAverage withdrawal force with steel pin of  $\phi 0.43$ :>50g

Mechanical life cycle:min 200

Operaling temperature:-40 $^{\circ}$ C to+105 $^{\circ}$ CSoldering temperature:+255 $^{\circ}$ C

TOLERANCE:

X.  $\pm XXX$ .X  $\pm 0.20$ .XX  $\pm 0.10$ 

ANG.



上海狮拓电子科技有限公司

產品名稱:

產品料號:

THIRD ANGLE PROJECTION



簽名 \_\_\_\_\_

日期 \_\_\_\_\_

審核 \_\_\_\_\_

日期 \_\_\_\_\_

客戶確認

 承認 \_\_\_\_\_ 日期 \_\_\_\_\_ 駁回 \_\_\_\_\_ 日期 \_\_\_\_\_

STOD-RXXXXXX1476B