
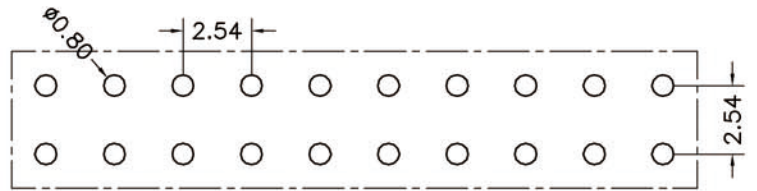


A B C D E

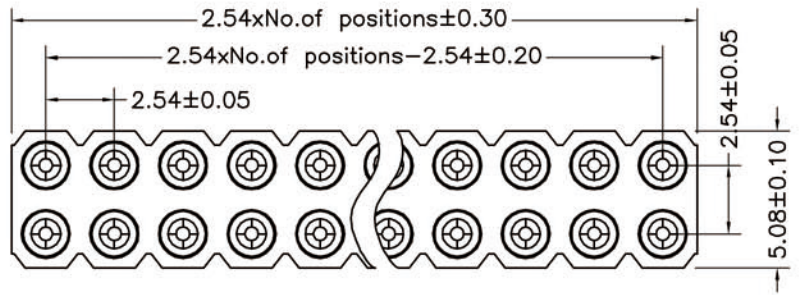

P. C. B LAYOUT

Technical Data

Material:
 Pin(outer sleeve):Brass,machined CuZn38Pb2
 Plating(outer sleeve):
 Tin Plated:2µm/80µm^{NI}, 5µm/200µ^{Sn}
 Gold Plated:2µm^{NI}/80µm^{Ni}, 0.8µ^{gold}
 Plating(Contact):2µm/80µ^{NI}, gold or Tin plated
 Insuiator:PPS UL94V-0
 ClIp(Contact 4 Flnger):Beryllium copper,heat teated

Electrical:

Current rating:3Amps/contact max.
 Contact resistance:≤4m Ω/contact
 Insuiation resistance:≥1000M Ω at V=100V
 Dielectrlc Withstanding Voltage:1000V AV Min
 Operating voltage:60VAC/DC

Mechanical:

Average Insertlon force with steel pin of Ø0.66mm/0.38":<250g
 Average withdrawal force with steel pin of Ø0.66mm/0.38":<70g
 Mechanical lige cycle:min 200
 Operating temperature:-40 ° C to+105 ° C
 Soldering temperature:+255 ° C

TOLERANCE:
X. ±XXX
.X ±0.20
.XX ±0.10
ANG.



上海狮拓电子科技有限公司

產品名稱: _____

產品料號: _____

THIRD ANGLE PROJECTION

簽名 _____
日期 _____
審核 _____
日期 _____

客戶確認	
<input type="checkbox"/> 承認 _____	日期 _____
<input type="checkbox"/> 駁回 _____	日期 _____

STOD2-DXXXXXX0740B-2