
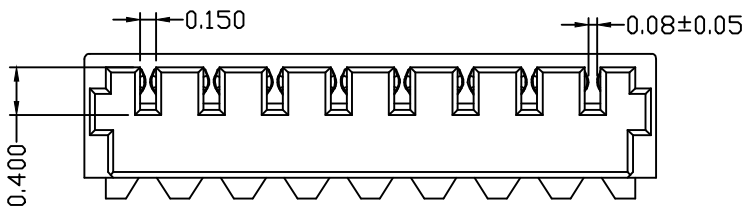

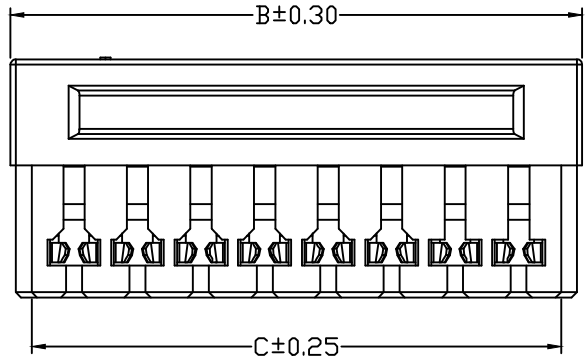
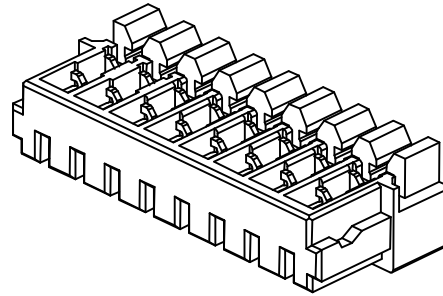


**R O H S**

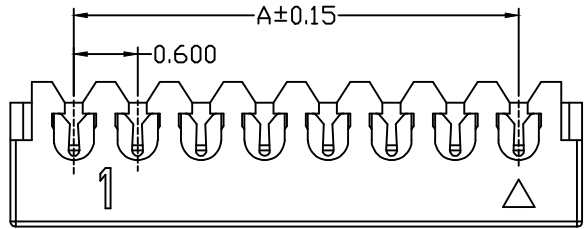

**Specification**

- Voltage Rating : 30V AC/DC
- Current Rating : 0.2A AC/DC
- Withstanding Voltage : 200V AC /minute
- Insulation Resistance : ≥100MΩ
- Temperature Range : - 25°C to + 85°C
- Contact Resistance : ≤30mΩ
- After Environmental Testing: ≤40mΩ
- Suitable Wire/Cable:AWG #34 to #36,OD:0.29mm max

页码	文件编号
1 OF 1	STO-CO-019

**Ordering Information**

A0601 H | - XX XX - XX XX XX - XX XX XX  
 1 2 3 4 5 6 7 8 9 10 11

- 1.A0601:Series No.
- 2.Category:H-Housing
- 3.Appearance type:Blank-Ordinary;I-IDC Socket
- 4.Number of rows&pins:XX
- 5.Plug the pin & Special No.:Blank-Ordinary;E-with Ears
- 6.Material(Insulators):N0-PA66,UL94V-0;LP-LCP,UL94V-0
- 7.Color:Blank-Natural;BK-Black
- 8.Environmental protection Standard:Blank-Ordinary  
RoHS;HF-Halogen Free
- 9.Material(Terminal):PB-Phosphor Bronze
- 10.Plating :SN-Bright Tin Plated;AU-Gold flash;AU3-Gold 3U"
- 11.Package:Blank-PE Tube,SPQ:1Kpcs/bundle preferred

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	0.60	1.80	1.35	12	6.60	7.80	7.35
03	1.20	2.40	1.95	13	7.20	8.40	7.95
04	1.80	3.00	2.55	14	7.80	9.00	8.55
05	2.40	3.60	3.15	15	8.40	9.60	9.15
06	3.00	4.20	3.75	16	9.00	10.20	9.75
07	3.60	4.80	4.35	17	9.60	10.80	10.35
08	4.20	5.40	4.95	18	10.20	11.40	10.95
09	4.80	6.00	5.55	19	10.80	12.00	11.55
10	5.40	6.60	6.15	20	11.40	12.60	12.15
11	6.00	7.20	6.75	22	12.00	13.20	12.75

A0601HI-XX-LPBKHF-PBSN	LCP,UL94V-0,Black Halogen Free	AWG#34-#36	0.29mm(max)	Phosphor Bronze	Tin plated	A0601WRS-XX-LPBKHF-PBAU
A0601HI-XX-LPBKHF-PBAU	LCP,UL94V-0,Black Halogen Free				Gold flash	
Part No.	Material(Insulators)	Suitable Wire	Insulation OD	Material(Terminal)	Finish	Mates with Wafer

TOLERANCE:

X.	±XXX
.X	±0.20
.XX	±0.10
ANG.	



上海狮拓电子科技有限公司

產品名稱:  
產品料號:

THIRD ANGLE PROJECTION

簽名 \_\_\_\_\_

日期 \_\_\_\_\_

審核 \_\_\_\_\_

日期 \_\_\_\_\_

客戶確認

承認 \_\_\_\_\_ 日期 \_\_\_\_\_

取回 \_\_\_\_\_ 日期 \_\_\_\_\_