
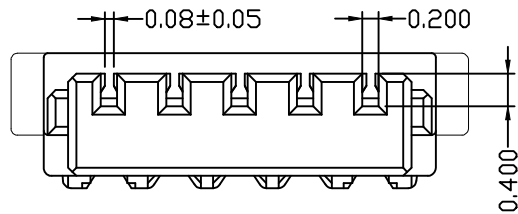

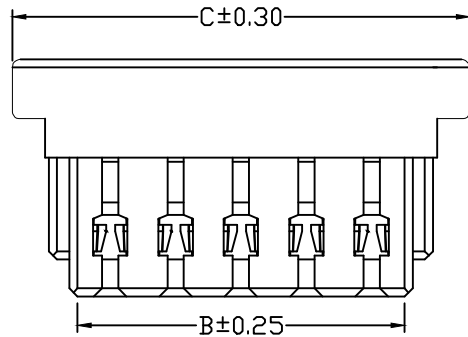
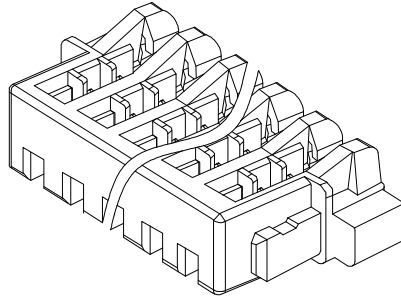


R O H S

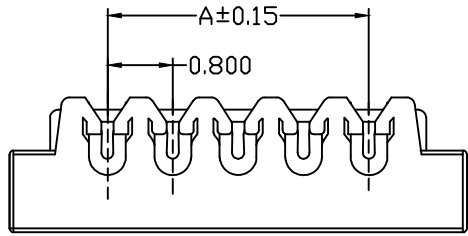

Specification

- Voltage Rating : 30V AC/DC
- Current Rating : 0.5A(32AWG) / 0.2A(36AWG) AC/DC
- Withstanding Voltage : 200V AC /minute
- Insulation Resistance : ≥100MΩ
- Temperature Range : - 25°C to + 85°C
- Contact Resistance : ≤20mΩ
- After Environmental Testing: ≤40mΩ
- Suitable Wire/Cable:AWG #32 to #36,OD:0.39mm max

Ordering Information

A0801 H | - XX XX - XX XX XX - XX XX XX
 1 2 3 4 5 6 7 8 9 10 11

- 1.A0801:Series No.
- 2.Category:H-Housing
- 3.Appearance type:Blank-Ordinary;I-IDC Socket
- 4.Number of rows&pins:XX
- 5.Plug the pin & Special No.:Blank-Ordinary;E-With Ears
- 6.Material(Insulators):N0-PA66,UL94V-0;LP-LCP,UL94V-0
- 7.Color:Blank-Natural;BK-Black
- 8.Environmental protection Standard:Blank-Ordinary
RoHS;HF-Halogen Free
- 9.Material(Terminal):PB-Phosphor Bronze
- 10.Plating :SN-Bright Tin Plated;AU-Gold flash;AU3-Gold 3U"
- 11.Package:Blank-PE Tube,SPQ:1Kpcs/bundle preferred

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	0.80	1.78	3.20	12	8.80	9.78	11.20
03	1.60	2.58	4.00	13	9.60	10.58	12.00
04	2.40	3.38	4.80	14	10.40	11.38	12.80
05	3.20	4.18	5.60	15	11.20	12.18	13.60
06	4.00	4.98	6.40	16	12.00	12.98	14.40
07	4.80	5.78	7.20	17	12.80	13.78	15.20
08	5.60	6.58	8.00	18	13.60	14.58	16.00
09	6.40	7.38	8.80	19	14.40	15.38	16.80
10	7.20	8.18	9.60	20	15.20	16.18	17.60
11	8.00	8.98	10.40	22	16.80	17.78	19.20

A0801HI-XXE-N0HF-PBAU	PA66,UL94V-0	AWG#32-#36	0.39mm(max)	Phosphor Bronze	Gold flash	A0801WRS-XX-LPHF-PBXX
A0801HI-XXE-N0HF-PBSN	Halogen Free				Tin plated	A0801WVS-XX-LPHF-PBXX
Part No.	Material(Insulators)	Suitable Wire	Insulation OD	Material(Terminal)	Finish	Mates with Wafer

TOLERANCE:

- X. ±XXX
- .X ±0.20
- .XX ±0.10
- ANG.



上海狮拓电子科技有限公司

產品名稱:
產品料號:

THIRD ANGLE PROJECTION

簽名 _____	客戶確認
日期 _____	
審核 _____	
日期 _____	
<input type="checkbox"/> 承認 _____ 日期 _____	
<input type="checkbox"/> 取回 _____ 日期 _____	