

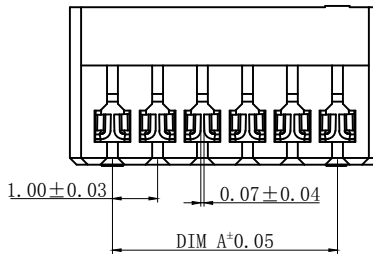

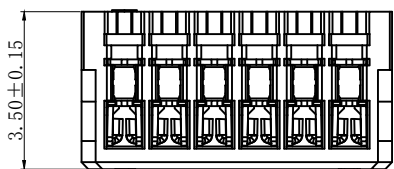



R O H S

页码	文件编号
1 OF 1	STO-CO-131

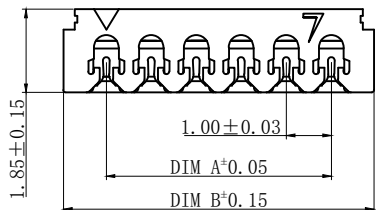

■ Specifications:

- Voltage rating: 30V AC/DC
- Current rating: 0.8A AC/DC
- Withstanding voltage: 200V AC/minute
- Temperature range: -25° C ~ +85° C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤40mΩ
- Wire range: 30AWG 7/0.1 OD:0.50mm
- Plastic material: PA66 UL 94V-0
- Terminal material: Phosphor Bronze
- Finish: Gold flash

0100 W XX 2 1 1 00
 ① ② ③ ④ ⑤ ⑥ ⑦

- ①Series:
- ②Category: W-Wire B-Board
- ③Circuit number: XX PIN
- ④Plastic material and color:
2-B e i PA66
- ⑤Terminal material & finish:
1-Gold-plated Phosphor bronze
- ⑥Finish specification: 1 - 1 U "
- ⑦Special code:
00-Empty

Poles	Dimensions		Poles	Dimensions	
	A	B		A	B
2	1.00	2.90	12	11.00	12.90
3	2.00	3.90	13	12.00	13.90
4	3.00	4.90	14	13.00	14.90
5	4.00	5.90	15	14.00	15.90
6	5.00	6.90	16	15.00	16.90
7	6.00	7.90	17	16.00	17.90
8	7.00	8.90	18	17.00	18.90
9	8.00	9.90	19	18.00	19.90
10	9.00	10.90	20	19.00	20.90
11	10.00	11.90			

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



上海狮拓电子科技有限公司

產品名稱:

產品料號:

THIRD ANGLE PROJECTION



簽名 _____

日期 _____

審核 _____

日期 _____

客戶確認

承認 _____ 日期 _____

取回 _____ 日期 _____

0100WXX21100

XXP 1.0mm WTB IDC Connector
beige Gold Plated