
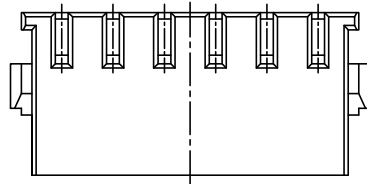

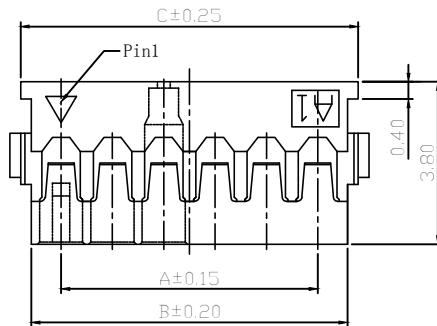



R O H S



■ Specifications:

- Voltage rating: 250V AC/DC
- Current rating: 7A AC/DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25° C ~ +85° C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ
- Wire range: 22-28AWG
- Plastic material: PA66 UL 94V-0

8120 H XX W 1 3 00
 ① ② ③ ④ ⑤ ⑥

- ① Series:
- ② Title: H-HSG(Housing)
- ③ Circuit number: XX P
- ④ Category: W-Wire B-Board
- ⑤ Color: 1-Black
- ⑥ Plastic material: 3-PA66
- ⑦ Special code:

Poles	Dimensions			Poles	Dimensions		
	A	B	C		A	B	C
2	1.20	2.60	3.10	9	9.60	11.00	11.50
3	2.40	3.80	4.30	10	10.80	12.20	12.70
4	3.60	5.00	5.50	11	12.00	13.40	13.90
5	4.80	6.20	6.70	12	13.20	14.60	15.10
6	6.00	7.40	7.90	13	14.40	15.80	16.30
7	7.20	8.60	9.10	14	15.60	17.00	17.50
8	8.40	9.80	10.30	15	16.80	18.20	18.70

页码	文件编号
1 OF 1	ST0-CD-127

TOLERANCE:

.X ±XXX

.X ±0.20

.XX ±0.10

ANG.



上海狮拓电子科技有限公司

产品名称

产品料号

THIRD ANGLE PROJECTION



签名

日期

审核

日期

客户确认

承认 _____ 日期 _____

取回 _____ 日期 _____

8120HXXW1300

XXP 1.20mm JST HSG Black