



R O H S

页码	文件编号
1 OF 1	ST0-CD-129

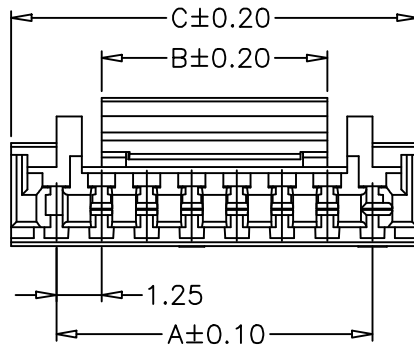

■Specifications:

- Voltage rating: 125V AC/DC
- Current rating: 1.0A AC/DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25° C ~ +85° C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤20mΩ
- Wire range: AWG #26~#30
- Plastic material: PA66 UL 94V-0

8125 H XX W 2 3 02

①Series:

②Title: H-HSG (Housing)


③Circuit number: XX PIN

④Category: W-Wire B-Board



⑤Color: 2-Natural

⑥Plastic material: 3-PA66

⑦Special code:

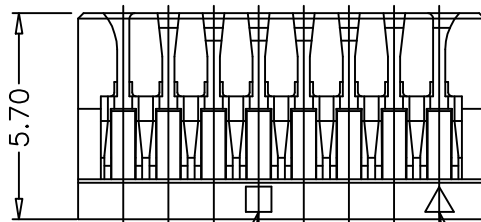

Circuit 5      Circuit 1

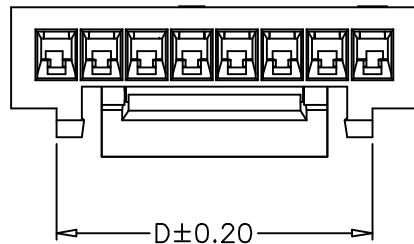

Poles	Dimensions				Poles	Dimensions			
	A	B	C	D		A	B	C	D
02	1.25	2.20	3.75	/	09	10.00	6.25	12.50	10.00
03	2.50	2.90	5.00	/	10	11.25	8.20	13.75	11.25
04	3.75	4.20	6.25	/	11	12.50	8.20	15.00	12.50
05	5.00	4.20	7.50	/	12	13.75	8.20	16.25	13.75
06	6.25	6.25	8.75	/	13	15.00	8.20	17.50	15.00
07	7.50	6.25	10.00	/	14	16.25	8.20	18.75	16.25
08	8.75	6.25	11.25	8.75	15	17.50	8.20	20.00	17.50

TOLERANCE:

.X ±XXX

.X ±0.20

.XX ±0.10

ANG.



上海狮拓电子科技有限公司

产品名称

产品料号

THIRD ANGLE PROJECTION



签名

日期

审核

日期

客户确认

承认 \_\_\_\_\_ 日期 \_\_\_\_\_

取回 \_\_\_\_\_ 日期 \_\_\_\_\_

8125HXXW2302

XXP 1.25mm HSG NC