

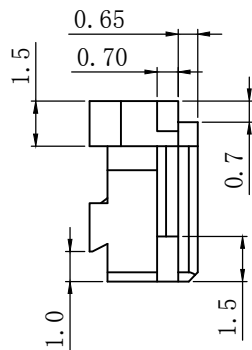


ROHS

页码	文件编号
1 OF 1	ST0-C0-132B

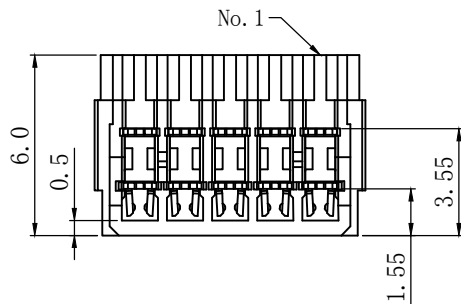

■ Specifications:

- Voltage rating: 50V AC/DC
- Current rating: 1A AC/DC
- Withstanding voltage: 200V AC/minute
- Temperature range: -30° C ~ +105° C
- Insulation resistance: $\geq 100M\Omega$
- Contact resistance: $\leq 50m\Omega$
- Wire range: 30AWG
- Plastic material: PA66 UL 94V-0
- Terminal material: Phosphor Bronze
- Finish: Tin-Plated

0150 W XX A 5 9 01

①Series:

②Category: W-Wire B-Board

③Circuit number: XX PIN

④Plastic material and color:


A-b e i PA66

⑤Terminal material & finish:


5-Phosphor bronze bright tin plating

⑥Finish specification: 9-70~120U"

⑦Special code:

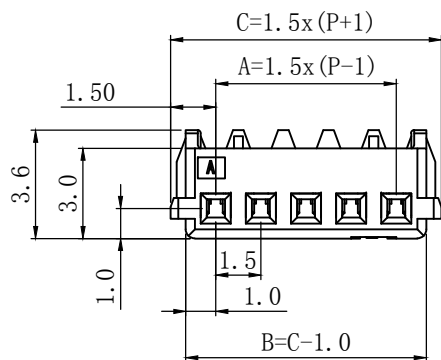

03~20P Position



02P Position

TOLERANCE:

X. $\pm XXX$

.X ± 0.20

.XX ± 0.10

ANG.



上海狮拓电子科技有限公司

产品名称:

产品料号:

THIRD ANGLE PROJECTION



签名 _____

日期 _____

审核 _____

日期 _____

客户确认

承认 _____ 日期 _____

取回 _____ 日期 _____

0150WXXA5901

XXP 1.5mm Mini CT IDC Connector beige 30AWG