


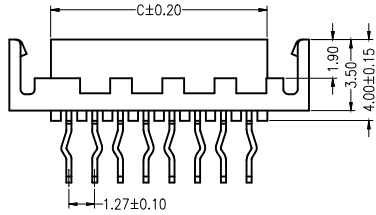


R O H S

ST0-C0-014

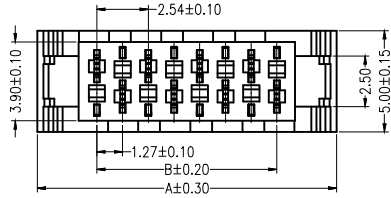

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)


■ Specifications(规格) :

- Voltage rating(额定电压): 500V AC / DC
- Current rating(额定电流): 1A AC / DC
- Withstanding voltage(耐压值): 500V AC/minute
- Temperature range(工作温度): -40°C~+105°C
- Insulation resistance(绝缘电阻): ≥1000MΩ
- Contact resistance(接触电阻): ≤20mΩ


■ Wafer(针座)

- Part No. (料号) : 1127WV XX RE9T SN CZ
- Poles (PIN数) :04-26P
- Material (材质) :PA9T UL 94V-0

Pin针:Bronze (青铜)
Finish (电镀) :Tin-Plated (镀锡)



1127 W V XX RE 9T SN- X



- ①系列 V - 1 8 0 ° R - 9 0 ° (带脚式)
- ②类别: W - W A F E R 类
- ③外观形态: V - 1 8 0 °
- ④PIN数: 单排- X X 双排- 2 * X X
- ⑤颜色: 空码-本色 BK - 黑色 BR - 棕色 OR - 橙色 YE - 黄色 GR - 绿色 PR - 紫色 GY - 灰色 WH - 白色 BN - 咖啡色 LB - 浅蓝色 RD - 暗红色
- ⑥成型方式: D- D I P S - S M T
- ⑦材质: 6 T - P A 6 T 9 T - P A 9 T 4 6 - P A 4 6 L P 1 8 (2 7 4 8 2 7 5 9 2 8 3 8 2 1) 2 0 3 0.02 24.13 25.92 19 22 32.56 26.67 28.46 17 24 35.10 29.21 31.00 15 26 37.64 31.75 33.54 13
- ⑧电镀类别: G * * - 镀金 V * * - 镀全金 S - 镀银 * 0 1 - 1 U " * 0 2 - 2 U " * 0 3 - 3 U " * 1 0 - 1 0 U " * 1 5 - 1 5 U " * 3 0 - 3 0 U " N - 镀镍 (3 0 - 5 0 U ") S N - 镀亮锡 (7 0) S N 1 - 镀亮锡 (1 2 0 U " M i n .) S W - 镀雾锡 H S - 高温锡
- ⑨特殊码: CZ - 有耳/ 有台/ 双槽 无燕尾

Circuit	Dimension			Q'ty /Tube
	A	B	C	
04	9.70	3.81	5.60	59
06	12.24	6.35	8.14	47
08	14.78	8.89	10.68	39
10	17.32	11.43	13.22	33
12	19.86	13.97	15.76	29
14	22.40	16.51	18.30	25
16	24.94	19.05	20.84	23
18	27.48	21.59	23.38	21
20	30.02	24.13	25.92	19
22	32.56	26.67	28.46	17
24	35.10	29.21	31.00	15
26	37.64	31.75	33.54	13

TOLERANCE:

- X ±XXX
- XX ±0.20
- XX ±0.10
- ANG.



上海狮拓电子科技有限公司

产品名称:

产品料号:

THIRD ANGLE PROJECT

签名 _____
日期 _____
审核 _____
日期 _____

客户确认

承认 _____ 日期 _____
 驳回 _____ 日期 _____

1127 WV XX RE9T SN CZ