


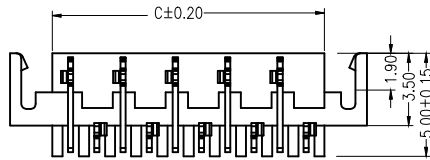


R O H S

STO-CO-013

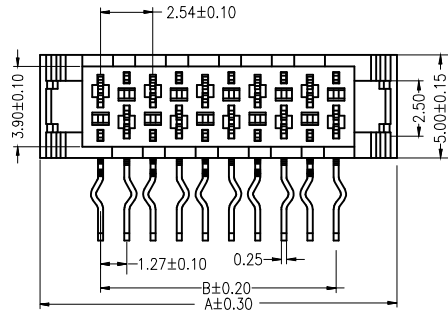


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

■ Specifications(规格) :

- Voltage rating(额定电压): 500V AC / DC
- Current rating(额定电流): 1A AC / DC
- Withstanding voltage(耐压值): 500V AC/minute
- Temperature range(工作温度): -40°C~+105°C
- Insulation resistance(绝缘电阻): ≥1000MΩ
- Contact resistance(接触电阻): ≤20mΩ

■ Wafer(针座)

- Part No. (料号) : 1127W XX RE L 9T SN CZ
- Poles (PIN数) : 04-26P
- Material (材质) : PA9T UL 94V-0
Pin针: Bronze (青铜)
Finish (电镀) : Tin-Plated (镀锡)

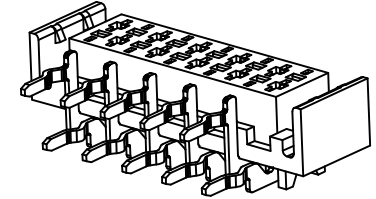

1127 W XX RE L 9T SN- X

①系列

②类别: W - W A F E R 类

③PIN数:

单排- X X 双排- 2 * X X

④颜色:

空码-本色 B K - 黑色 B R - 棕色
O R - 橙色 Y E - 黄色 G R - 绿色
P R - 紫色 G Y - 灰色 W H - 白色
B N - 咖啡色 L B - 浅蓝色 R D - 暗红色

⑤成型方式:

D - D I P S - S M T 0 ° 侧插

⑥材质:

6 T - P A 6 T 9 T - P A 9 T 4 6 - P A 4 6 L
T S - 其它

⑦电镀类别: G * * - 镀金 V * * - 镀全金 S - 镀银

* 0 1 - 1 U " * 0 2 - 2 U " * 0 3 - 3 U "
* 1 0 - 1 0 U " * 1 5 - 1 5 U " * 3 0 - 3 0 U "
N - 镀镍 (3 0 - 5 0 U ") S N - 镀亮锡 (7
S N 1 - 镀亮锡 (1 2 0 U " M i n .) S W - 镀雾锡

⑧空PIN位置及特殊码:

CZ-有耳/ 有台/ 双槽 燕尾

Circuit	Dimension			Q'ty /Tube
	A	B	C	
R E 04	9.70	3.81	5.60	59
08	12.24	6.35	8.14	47
08	14.78	8.89	10.68	39
T S 10	17.32	11.43	13.22	33
12	19.86	13.97	15.76	29
14	22.40	16.51	18.30	25
16	24.94	19.05	20.84	23
18	27.48	21.59	23.38	21
20	30.02	24.13	25.92	19
22	32.56	26.67	28.46	17
24	35.10	29.21	31.00	15
26	37.64	31.75	33.54	13

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



上海狮拓电子科技有限公司

產品名稱:

產品料號:

THIRD ANGLE PROJECTIO

簽名

日期

審核

日期

客戶確認

承認 _____ 日期 _____

駁回 _____ 日期 _____

1127 W XX RE L 9T SN CZ