
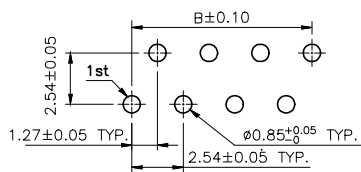

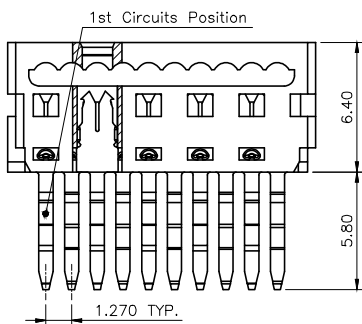


R O H S

页码	文件编号
1 OF 1	ST0-CD-023

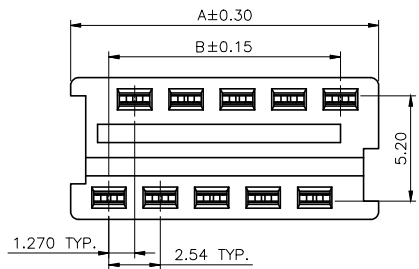

Recommended
P.C. Board Layout


■ Specifications(规格) :

- Voltage rating(额定电压): 500V AC / DC
- Current rating(额定电流): 1.0A AC / DC
- Withstanding voltage(耐压值): 500V AC/minute
- Temperature range(工作温度): -40°C~+105°C
- Insulation resistance(绝缘电阻): ≥1000MΩ
- Contact resistance(接触电阻): ≤15mΩ

■ I DT

- Part No. (料号) : 2127IAT XX WHPT SN
- Poles (PIN数) :04-26P
- Material (材质) :PBT UL 94V-0

Pin针:Phosphor Bronze (磷青铜)
Finish (电镀) :Tin-Plated (镀锡)



2127 I AT XX WH PT SN- X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

①系列

②类别: I-IDT类

③外观形态:

AT-A端

BT-B端

④PIN数:

单排- X X

双排- 2 * X X

⑤颜色:

WH - 白色 XX- 其它

⑥材质:

6T - PA6T

9T - PA9T

46 - PA46

LP

108P

TS - 其它

⑦电镀类别: G** - 镀金 V** - 镀全金 S - 镀银

*01 - 1U"

*02 - 2U"

*03 - 3U"

*05 - 5U"

*10 - 10U"

*15 - 15U"

*30 - 30U"

*50 - 50U"

N - 镀镍(30-50U")

SN - 镀亮锡(70-120U")

SN1 - 镀亮锡(120U" Min.)

SW - 镀雾锡

HS - 新温

⑧空PIN位置及特殊码:

Circuit	Dimension	
	A	B
04	7.59	3.81
06	10.13	6.35
08	12.67	8.89
10	15.21	11.43
12	17.75	13.97
14	20.29	16.51
16	22.83	19.05
18	25.37	21.59
20	27.91	24.13
22	30.45	26.67
24	32.99	29.21
26	35.53	31.72

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



上海狮拓电子科技有限公司

產品名稱:

產品料號:

THIRD ANGLE PROJECTION

簽名

日期

審核

日期

客戶確認

承認 _____ 日期 _____

取回 _____ 日期 _____

2127IATXXWHPTSN

XXP1.27 mmIDT DIP Plug