


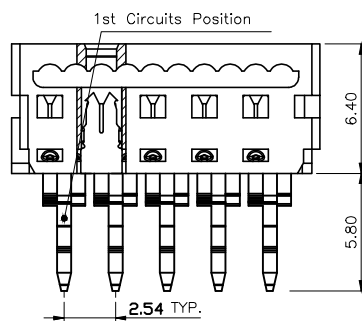


R O H S

页 码	文 件 编 号
1 OF 1	ST0-CD-024

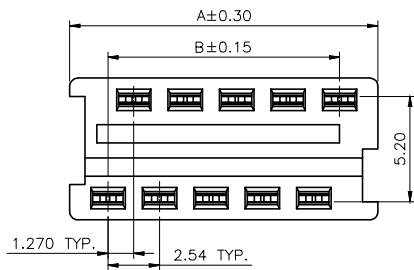


### Specifications(规格) :

- Voltage rating(额定电压): 500V AC / DC
- Current rating(额定电流): 1.0A AC / DC
- Withstanding voltage(耐压值): 500V AC/minute
- Temperature range(工作温度): -40°C~+105°C
- Insulation resistance(绝缘电阻): ≥1000MΩ
- Contact resistance(接触电阻): ≤15mΩ

### IDENTIFICATION

- Part No. (料号) : 2127 I BTXX WH PT SN
- Poles (PIN数) : 04-26P
- Material (材质) : PBT UL 94V-0  
Pin针: Phosphor Bronze (磷青铜)  
Finish (电镀) : Tin-Plated (镀锡)



2127 I BTXX WH PT SN- X  
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① 系列
- ② 类别: I-IDT类
- ③ 外观形态:

AT-A端 BT-B端

- ④ PIN数:  
单排- X X 双排- 2 \* X X

- ⑤ 颜色:  
WH - 白色 XX- 其它

- ⑥ 材质:  
6 T - PA 6 T 9 T - PA 9 T 4 6 - PA 4 6 L P - L C P  
T S - 其它

- ⑦ 电镀类别: G \* \* - 镀金 V \* \* - 镀全金 S - 镀银  
\* 0 1 - 1 U " \* 0 2 - 2 U " \* 0 3 - 3 U "  
\* 1 0 - 1 0 U " \* 1 5 - 1 5 U " \* 3 0 - 3 0 U "  
N - 镀镍 ( 3 0 - 5 0 U " ) S N - 镀亮锡 ( 7 0 - 1 2 0 U " )  
S N 1 - 镀亮锡 ( 1 2 0 U " M i n . ) S W - 镀雾锡 H S - 高温

- ⑧ 空PIN位置及特殊码:

Circuit	Dimension	
	A	B
04	7.59	3.81
06	10.13	6.35
08	12.67	8.89
10	15.21	11.43
12	17.75	13.97
14	20.29	16.51
16	22.83	19.05
18	25.37	21.59
20	27.91	24.13
22	30.45	26.67
24	32.99	29.21
26	35.53	31.72

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



上海狮拓电子科技有限公司

產品名稱:

產品料號:

THIRD ANGLE PROJECTION

簽名

日期

審核

日期

客戶確認

☐ 承認 \_\_\_\_\_ 日期 \_\_\_\_\_

☐ 駁回 \_\_\_\_\_ 日期 \_\_\_\_\_

2127 I BTXX WH PT SN  
XXP 1.27mm IDT DIP Plug