
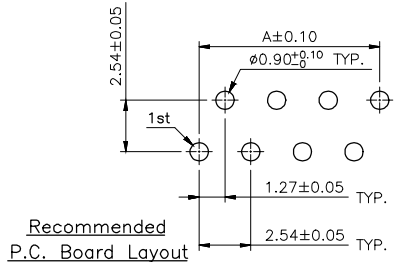
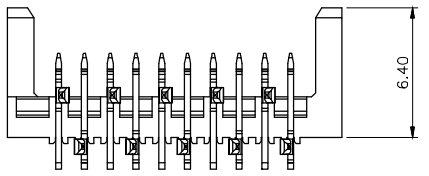
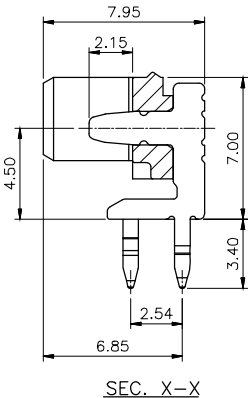


R O H S

页码	文件编号
1 OF 1	ST0-CD-026

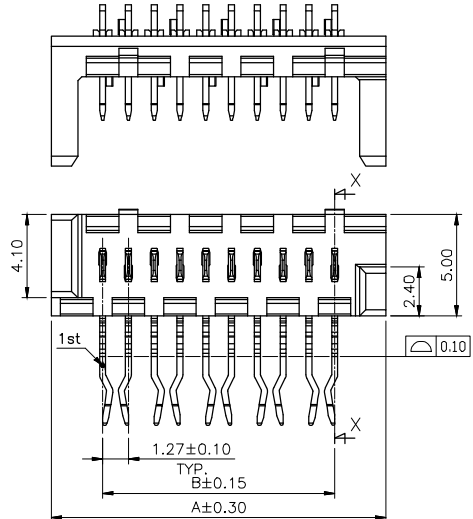


■ Specifications(规格) :

- Voltage rating(额定电压): 500V AC / DC
- Current rating(额定电流): 1.0A AC / DC
- Withstanding voltage(耐压值): 500V AC/minute
- Temperature range(工作温度): -40°C~+105°C
- Insulation resistance(绝缘电阻): ≥1000MΩ
- Contact resistance(接触电阻): ≤15mΩ

■ Wafer(针座)

- Part No. (料号) : 2127WRXXB10TSN
- Poles (PIN数) :04-26P
- Material (材质) :Nylon 10T+ G.F UL 94V-0
- Pin针: Brass (黄铜)
- Finish (电镀) :Tin-Plated (镀锡)



2127 W R XX B 10T SN

- ①系列
- ②类别: W-Wafer类
- ③外观形态:
V - 180°
- ④PIN数:
X X PIN
- ⑤颜色:
W - 白色 B- 黑色

R - 90° (带脚式)

- ⑥材质:
10T - PA10T 9T - PA9T 46 - PA46 L P08 L
TS - 其它
- ⑦电镀类别: G** - 镀金 V** - 镀全金 S - 镀银
*01 - 1U" *02 - 2U" *03 - 3U"
*10 - 10U" *15 - 15U" *30 - 30U"
N - 镀镍(30-50U") SN - 镀亮锡(70-110U")
SN1 - 镀亮锡(120U" Min.) SW - 镀雾锡 HS - 高温

Circuit	Dimension	
	A	B
04	8.89	3.81
06	11.40	6.35
10	16.48	11.43
12	19.02	13.97
*05	21.56	16.51
*10	24.10	19.05
15	26.64	21.59
20	29.18	24.13
22	31.72	26.67
24	34.26	29.21
26	36.77	31.72

TOLERANCE:
X. ±XXX
.X ±0.20
.XX ±0.10
ANG.

STO 上海狮拓电子科技有限公司

產品名稱: _____

產品料號: _____

THIRD ANGLE PROJECTION

簽名 _____

日期 _____

審核 _____

日期 _____

客戶確認

承認 _____ 日期 _____

駁回 _____ 日期 _____

2127WRXXB10TSN

XXP 1.27mm IDT 90° Wafer