
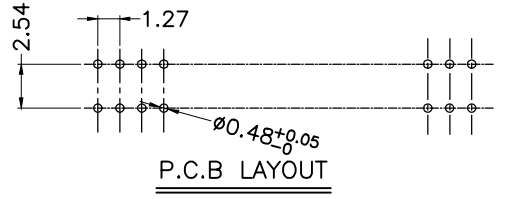
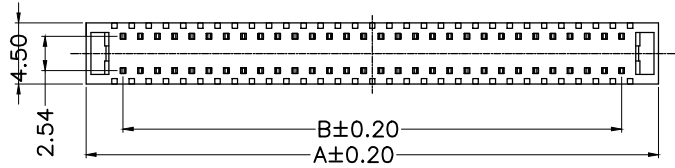


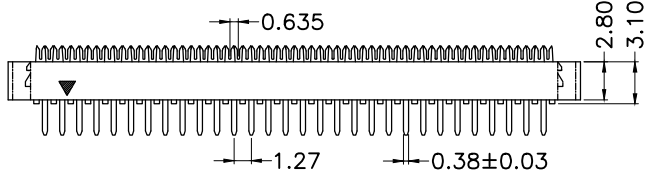
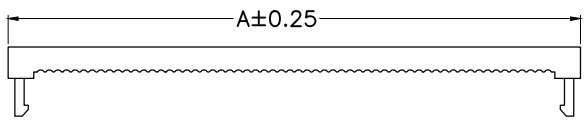


**R O H S**

页码	文件编号
1 OF 1	ST0-CO-061



- Specifications(规格) :
- Current rating(额定电流): 1A AC / DC
  - Withstanding voltage(耐压值): 500V AC/minute
  - Temperature range(工作温度): -40°C~+105°C
  - Insulation resistance(绝缘电阻): ≥1000MΩmin.at 500V DC
  - Contact resistance(接触电阻): ≤30mΩmax.at DC 100mA

- DI P
- Part No. (料号) : 5127D2\*XXBKPTV01W
  - Poles (PIN数) : 50P,60P,80P
  - Material (材质) : PBT+30% Glass Filled UL 94V-0  
Pin针: Phosphor Bronze (磷青铜)  
Finish (电镀) : Whole Gold Plated over Nickel(镀全金)

5127 D 2\*XX BK PT V01 X

- ① 系列
- ② 类别: D-DIP类
- ③ PIN数:  
单排- X X      双排- 2 \* X X
- ④ 颜色:  
BK - 黑色      GY - 灰色
- ⑤ 材质:  
6T - PA6T      9T - PA9T      46 - PA46  
TS - 其它
- ⑥ 电镀类别: G\*\* - 镀金      V\*\*H\* 镀全镀半金  
\*01 - 1U"      \*02 - 2U"      \*03 - 3U"  
\*10 - 10U"      \*15 - 15U"      \*30 - 30U"  
N - 镀镍(30-50U")      SN - 镀亮锡(70-120U")  
SN1 - 镀亮锡(120U" Min.)      S - 镀银  
SW - 镀雾锡      HS - 高温锡
- ⑦ 空PIN位置及特殊码:  
W-间距1.27\*2.54mm

Circuit	Dimension	
	L P = L C P <sup>A</sup>	P T = P B T <sup>B</sup>
50	35.95	30.48
60	42.30	36.83
80	55.00	49.53

TOLERANCE:

X.	±XXX
.X	±0.20
.XX	±0.10
ANG.	???:

**STO** 上海狮拓电子科技有限公司

THIRD ANGLE PROJECTION

客户确认

姓名 \_\_\_\_\_

日期 \_\_\_\_\_

审核 \_\_\_\_\_

日期 \_\_\_\_\_

承认 \_\_\_\_\_ 日期 \_\_\_\_\_

取回 \_\_\_\_\_ 日期 \_\_\_\_\_

5127D2\*XXBKPTV01W

1.27mm\*2.54mmDIP Plug