
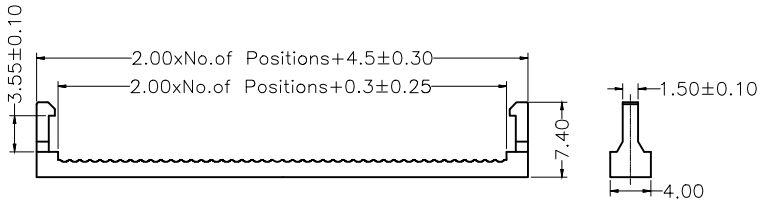
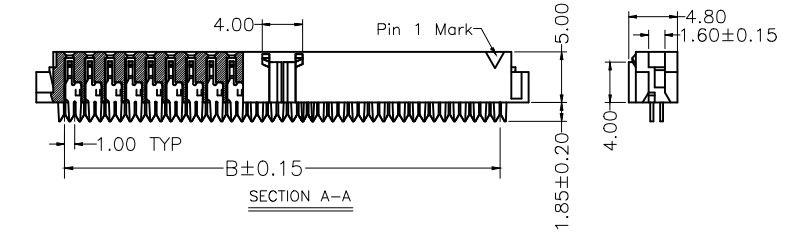

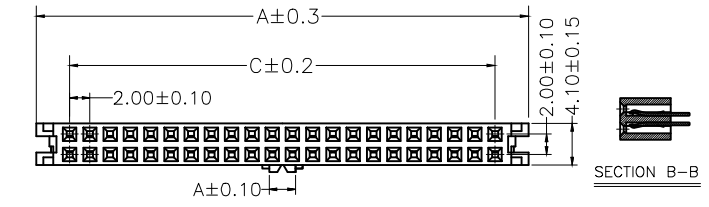


ROHS

页码	文件编号
1 OF 1	ST0-C0-037

- Specifications(规格) :
- Current rating(额定电流): 1A AC / DC
 - Withstanding voltage(耐压值): 500V AC/minute
 - Temperature range(工作温度): -40°C~+105°C
 - Insulation resistance(绝缘电阻): ≥1000MΩ
 - Contact resistance(接触电阻): ≤20mΩ

- I DC
- Part No. (料号) : 4200IYXXBKPTH01S2F
 - Poles (PIN数) : 06-50P
 - Material (材质) : PBT+30% Glass Fiber (UL94V-0).
 - Pin针: Bronze (青铜)
 - Finish (电镀) : Contact-Plated (接触点镀金)
 - Bottom-Nickel (底部镀镍)

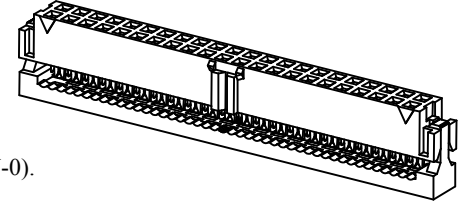

4200 I Y XX BK PT H01- S2 X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① 系列
- ② 类别: I-DC类
- ③ 外观形态:
N- 无鼻 Y-有鼻
- ④ PIN数:
X R位
- ⑤ 颜色:
BK - 黑色 GY - 灰色
- ⑥ 材质:
6 T - PA 6 T 9 T - PA 9 T 46 - PA 46 LP
TS - 其它
- ⑦ 电镀类别: G** - 镀金 V**H* 镀全镀半金
* 01 - 1 U " * 02 - 2 U " * 03 - 3 U "
* 10 - 10 U " * 15 - 15 U " * 30 - 30 U "
N - 镀镍 (30 - 50 U ") SN - 镀亮锡 (70
SN1 - 镀亮锡 (120 U " Min.) S - 镀银
SW - 镀雾锡 HS - 高温锡
- ⑧ 成品的件数
S2-二件式 S3-三件式
- ⑨ 空PIN位置及特殊码:
F-FCI

Circuit	Dimension		
	A	B	C
6	10.60	5.00	4.00
8	12.60	7.00	6.00
10	14.60	9.00	8.00
12	16.60	11.00	10.00
14	18.60	13.00	12.00
16	20.60	15.00	14.00
18	22.60	17.00	16.00
20	24.60	19.00	18.00
22	26.60	21.00	20.00
24	28.60	23.00	22.00
26	30.60	25.00	24.00
28	32.60	27.00	26.00
30	34.60	29.00	28.00
32	36.60	31.00	30.00
34	38.60	33.00	32.00
36	40.60	35.00	34.00
38	42.60	37.00	36.00
40	44.60	39.00	38.00
44	48.60	43.00	42.00
48	52.60	47.00	46.00
50	54.60	49.00	48.00

TOLERANCE:

X. ±XXX
.X ±0.20
.XX ±0.10
ANG.

ST 上海狮拓电子科技有限公司

产品名称: _____

产品料号: _____

THIRD ANGLE PROJECTION

签名 _____

日期 _____

审核 _____

日期 _____

客户确认

承認 _____ 日期 _____

駁回 _____ 日期 _____

4200IYXXBKPTH01S2F
 XXP 2.0mm FCI二件有凸半金1U