




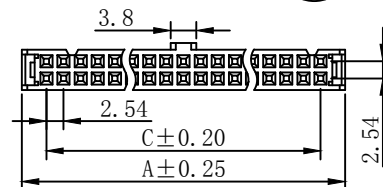
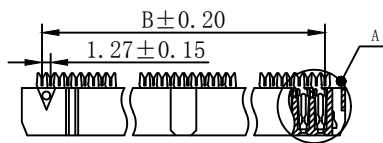



R O H S

页码	文件编号
1 OF 1	ST0-C0-045

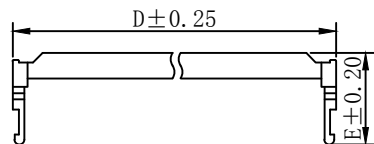

■ Specifications(规格):

- Current rating(额定电流): 1A AC / DC
- Withstanding voltage(耐压值): 500V AC/minute
- Temperature range(工作温度): -40°C~+105°C
- Insulation resistance(绝缘电阻): ≥1000MΩ
- Contact resistance(接触电阻): ≤15mΩ

■ IDC

- Part No. (料号): 4254 IYXXGYPT H01-S3 Y
- Poles (PIN数): 06-64P
- Material (材质): PBT Glass Fiber (UL94V-0).
Pin针: Bronze (青铜)
Finish (电镀): Contact-Plated (接触点镀金)
Bottom-Nickel (底部镀镍)

4254 I Y XX G Y P T H 01-S3 Y
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① 系列
- ② 类别: I-IDC类
- ③ 外观形态:
N - 鼻 Y - 有鼻
- ④ PIN数:
X X
- ⑤ 颜色:
B K - 黑色 G Y - 灰色
- ⑥ 材质:
6 T - P A 6 T 9 T - P A 9 T 4 6 - P A 4 6
T S - 其它
- ⑦ 电镀类别: G * * - 镀金 V * * H * 镀全镀半金
* 0 1 - 1 U " * 0 2 - 2 U " * 0 3 - 3 U "
* 1 0 - 1 0 U " * 1 5 - 1 5 U " * 3 0 - 3 0 U "
N - 镀镍 (3 0 - 5 0 U ") S N - 镀亮锡
S N 1 - 镀亮锡 (1 2 0 U " M i n .) S - 镀银
S W - 镀雾锡 H S - 高温锡

- ⑧ 成品的件数
S2-二件式 S3-三件式
- ⑨ 空PIN位置及特殊码:
Y-Y端

Circuit	Dimension					
	A	B	C	D	E	F
8	14.86	8.89	7.62	14.66	13.55	5.00
10	17.40	11.43	10.16	17.20	13.55	5.00
12	19.94	13.97	12.70	19.74	13.55	5.00
14	22.48	16.51	15.24	22.28	13.55	5.00
16	25.02	19.05	17.78	24.82	13.55	5.00
18	27.56	21.59	20.32	27.36	13.55	5.00
20	30.10	24.13	22.86	29.90	13.55	5.00
24	35.18	29.21	27.94	34.98	13.55	5.00
30	42.80	36.80	35.60	42.80	13.45	4.85
36	47.68	41.94	40.64	47.68	13.55	5.00
40	50.42	44.45	43.18	50.22	13.55	5.00
44	55.50	49.53	48.26	55.30	13.55	5.00
50	60.58	54.61	53.34	60.38	13.55	5.00
60	68.20	62.23	60.96	68.40	13.45	4.85
64	80.90	74.93	73.66	80.70	13.55	5.00
64	85.98	80.01	78.74	85.78	13.55	5.00

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



上海狮拓电子科技有限公司

产品名称:

产品料号:

THIRD ANGLE PROJECTION



姓名 _____

日期 _____

审核 _____

日期 _____

客户确认

承认 _____ 日期 _____

撤回 _____ 日期 _____

4254IYXXGYPTH01S3Y

XXP 2.54mm FC双面接触 三件有凸半金IU