
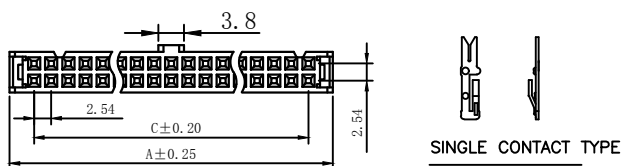
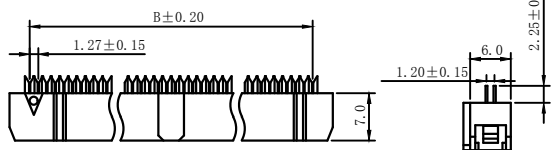
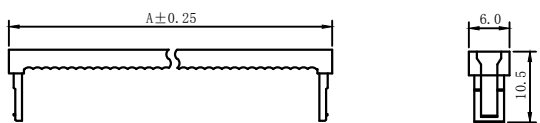


R O H S

页码	文件编号
1 OF 1	ST0-C0-047

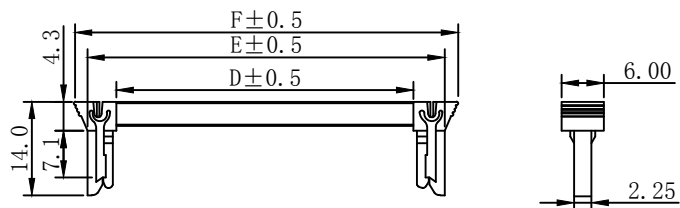

■ Specifications(规格) :

- Current rating(额定电流): 1A AC / DC
- Withstanding voltage(耐压值): 500V AC/minute
- Temperature range(工作温度): -40°C~+105°C
- Insulation resistance(绝缘电阻): ≥1000MΩ
- Contact resistance(接触电阻): ≤20mΩ

■ IDC

- Part No. (料号) : 4254IYXXBKPTH01S3H
- Poles (PIN数) : 10-40P
- Material (材质) : PBT+30% Glass Fiber (UL94V-0).

Pin针: Bronze (青铜)
Finish (电镀) :Contact-Plated (接触点镀金)
Bottom-Nickel (底部镀镍)

4254 I Y XX BK PT H01- S3 H

- ①系列
- ②类别: I-IDC类
- ③外观形态:
N- 无鼻 Y-有鼻
- ④PIN数:
X X PIN
- ⑤颜色:
B K - 黑色 G Y - 灰色

- ⑥材质:
6 T - P A 6 T 9 T - P A 9 T 4 6 - P A 4 6
T S - 其它
- ⑦电镀类别: G * * - 镀金 V * *H* 镀全镀半金
* 0 1 - 1 U " * 0 2 - 2 U " * 0 3 - 3 U "
* 1 0 - 1 0 U " * 1 5 - 1 5 U " * 3 0 - 3 0 U " * 5 0 - 5 0 U "
N - 镀镍 (3 0 - 5 0 U ") S N - 镀亮锡 (7 0 - 1 2 0 U ")
S N 1 - 镀亮锡 (1 2 0 U " M i n .) S - 镀银
S W - 镀雾锡 H S - 高温锡

- ⑧成品的件数
S2-二件式 S3-三件式
- ⑨空PIN位置及特殊码:
H-蝴蝶型

Circuit	Dimension					
	A	B	C	D	E	F
6	12.32	6.35	5.08	8.02	17.00	21.40
8	14.86	8.89	7.62	10.56	19.54	23.94
10	17.40	11.43	10.16	13.10	22.08	26.48
12	19.94	13.97	12.70	15.64	24.62	29.02
14	22.48	16.51	15.24	18.18	27.16	31.56
16	25.02	19.05	17.78	20.72	29.70	34.10
20	30.10	24.13	22.86	25.80	34.78	39.18
26	37.72	31.75	30.48	33.42	42.40	46.80
30	42.80	36.83	35.56	38.50	47.48	51.88
34	47.88	41.91	40.64	43.58	52.56	56.96
40	55.50	50.55	50.86	51.20	60.18	64.58

TOLERANCE:

X.	±XXX
.X	±0.20
.XX	±0.10
ANG.	



上海狮拓电子科技有限公司

产品名称:
产品料号:

THIRD ANGLE PROJECTION

签名 _____
日期 _____
审核 _____
日期 _____

客户确认

承认 _____ 日期 _____
 取回 _____ 日期 _____

4254IYXXBKPTH01S3H

XXP 2.54mm FC三件有凸蝴蝶扣半金1U