



R O H S

页码	文件编号
1 OF 1	ST0-CO-067

- Specifications(规格) :
- Current rating(额定电流): 1A AC / DC
 - Withstanding voltage(耐压值): 500V AC/minute
 - Temperature range(工作温度): -40°C~+105°C
 - Insulation resistance(绝缘电阻): ≥1000MΩ
 - Contact resistance(接触电阻): ≤20mΩ

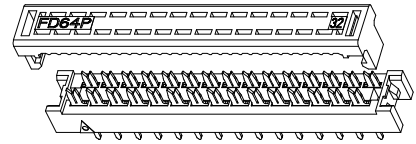

- Wafer(针座)
- Part No. (料号) : 5254 DXXBKPTH016
 - Poles (PIN数) : 6~64P
 - Material (材质) : PBT + Glass Fiber (UL94V-0)
 - Pin针: Bronze (青铜)
 - Finish (电镀) : Contact-Plated (接触点镀金)
 - Bottom-Nickel (底部镀镍)

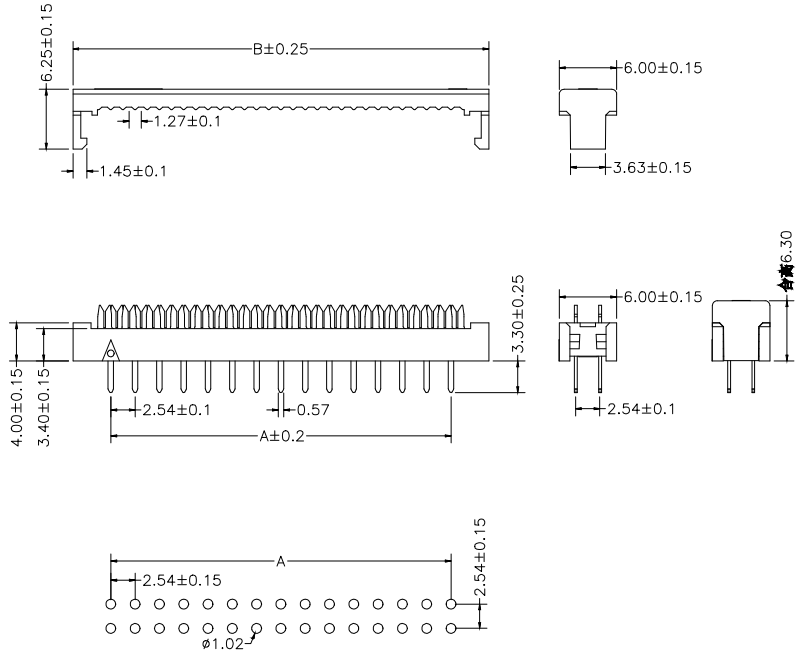

5254 D XX BK PT H01 X
① ② ③ ④ ⑤ ⑥ ⑦

- ① 系列
- ② 类别: D-DI P类
- ③ PIN数: X P位
- ④ 颜色: B K - 黑色 G Y - 灰色
- ⑤ 材质: 6 T - PA 6 T 9 T - PA 9 T 4 6 - PA 4 6 L P T S - 其它
- ⑥ 电镀类别: G * * - 镀金 V * * H * 镀全镀半金
 * 0 1 - 1 U " * 0 2 - 2 U " * 0 3 - 3 U "
 * 1 0 - 1 0 U " * 1 5 - 1 5 U " * 3 0 - 3 0 U "
 N - 镀镍 (3 0 - 5 0 U ") S N - 镀亮锡 (7 0 U ")
 S N 1 - 镀亮锡 (1 2 0 U " M i n .) S - 镀银
 S W - 镀雾锡 H S - 高温锡
- ⑦ 空PIN位置及特殊码:
6 - 合高6 .mm

Circuit	Dimension	
	A	B
6	12.98	5.08
8	15.52	7.62
10	18.06	10.16
12	20.60	12.70
14	23.14	15.24
16	25.68	17.78
18	28.22	20.32
20	30.76	22.86
24	35.84	27.94
26	38.38	30.48
30	43.46	35.56
34	48.54	40.64
40	56.16	48.26
44	61.24	53.34
50	68.86	60.96
60	81.56	73.66
64	86.64	78.74

TOLERANCE: X. ±XXX .X ±0.20 .XX ±0.10 ANG. ????	STO	上海狮拓电子科技有限公司		签名 _____	客户确认	5254DXXBKPTH016 XXP 2.54mm FD二件半金1U(H6.3)	
				日期 _____			<input type="checkbox"/> 承认 _____ 日期 _____ <input type="checkbox"/> 取回 _____ 日期 _____
				审核 _____			
				日期 _____			
THIRD ANGLE PROJECT							