

**R O H S**




页码	文件编号
1 OF 1	ST0-CO-063

■ Specifications(规格) :

- Current rating(额定电流): 1A AC / DC
- Withstanding voltage(耐压值): 500V AC/minute
- Temperature range(工作温度): -40°C~+105°C
- Insulation resistance(绝缘电阻): ≥1000MΩ
- Contact resistance(接触电阻): ≤20mΩ

■ D I P

- Part No. (料号) : 5254 DXXBKPTH01WW
- Poles (PIN数) : 10-60P
- Material (材质) : PBT + Glass Fiber (UL94V-0)  
Pin针: Bronze (青铜)  
Finish (电镀) : Contact-Plated (接触点镀金)  
Bottom-Nickel (底部镀镍)

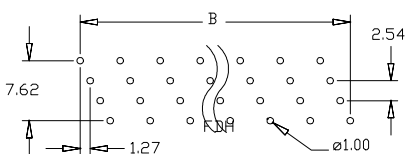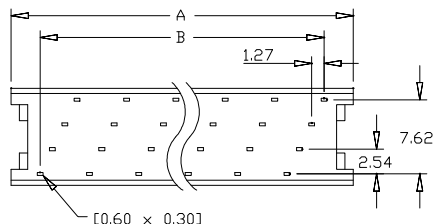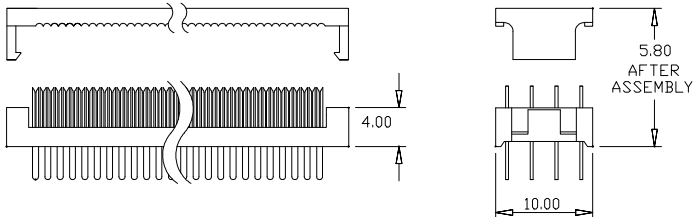

5254 D XX BK PT H01 - X  
① ② ③ ④ ⑤ ⑥ ⑦

①系列

②类别: D-DIP类

③PIN数:

单排- X X      双排- 2 \* X X

④颜色:

B K - 黑色      G Y - 灰色

⑤材质:

6 T - P A 6 T      9 T - P A 9 T      4 6 - P A 4 6      L P 1 6 C 2 5 1 2 1 9 0 5 P B T

T S - 其它

⑥电镀类别: G \* \* - 镀金      V \* \* H \* 镀全镀半金

\* 0 1 - 1 U "      \* 0 2 - 2 U "      \* 0 3 - 3 U "

\* 1 0 - 1 0 U "      \* 1 5 - 1 5 U "      \* 3 0 - 3 0 U "

N - 镀镍 ( 3 0 - 5 0 U " )      S N - 镀亮锡 ( 7

S N 1 - 镀亮锡 ( 1 2 0 U " M i n . )      S - 镀银

S W - 镀雾锡      H S - 高温锡

⑦空PIN位置及特殊码:

WW-PIN针间距为1.27. 5742

Circuit	Dimension	
	A	B
10	17.50	11.43
14	22.58	16.51
16	25.12	19.05
20	30.20	24.13
26	37.82	31.75
34	47.98	41.91
40*	55.60	49.53
50*	68.30	62.23
60	81.00	74.93

TOLERANCE:

X.	±XXX
.X	±0.20
.XX	±0.10
ANG.	???:



上海狮拓电子科技有限公司

签名 \_\_\_\_\_  
日期 \_\_\_\_\_  
审核 \_\_\_\_\_  
日期 \_\_\_\_\_

客户确认

承认 \_\_\_\_\_ 日期 \_\_\_\_\_  
 取回 \_\_\_\_\_ 日期 \_\_\_\_\_

5254DXXBKPTH01WW  
1.27\*2.54\*7.62mm DIP PIUG

THIRD ANGLE PROJECT