

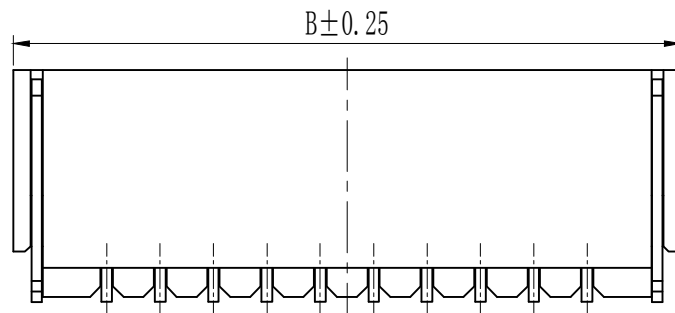
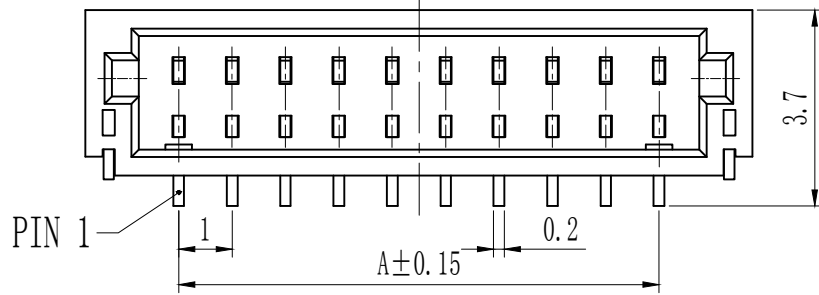



Pin数	尺寸A	尺寸B
2	1.00	4.50
3	2.00	5.50
4	3.00	6.50
5	4.00	7.50
6	5.00	8.50
7	6.00	9.50
8	7.00	10.50
9	8.00	11.50
10	9.00	12.50
11	10.00	13.50
12	11.00	14.50
13	12.00	15.50
14	13.00	16.50
15	14.00	17.50
16	15.00	18.50
17	16.00	19.50
18	17.00	20.50
19	18.00	21.50
20	19.00	22.50
21	20.00	23.50
22	21.00	24.50
23	22.00	25.50
24	23.00	26.50
25	24.00	27.50

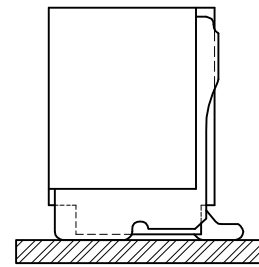

P.C.B LAYOUT

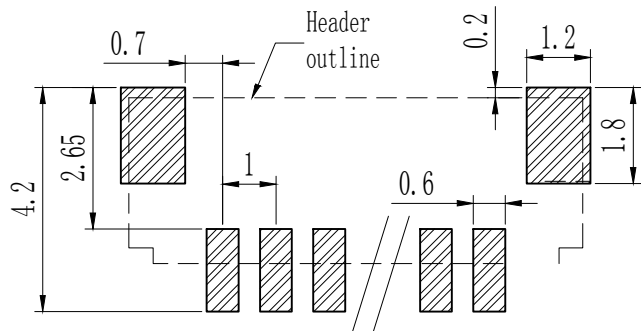

Assembly Layout

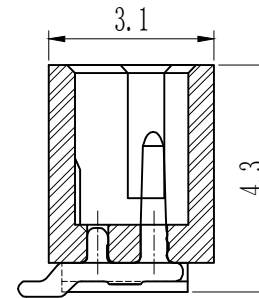


技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28~#32
Applicable Wire: AWG#28~#32
- ◆额定电压: 50V DC, AC(rms)
Rated Current: 1A(AWG #28)
- ◆耐压值: 500V AC/minute
Withstand voltage: 500V AC/min
- ◆工作温度: -25℃~+85℃
Working Temp: -25℃~+85℃
- ◆绝缘电阻: 100MΩ Min
Insulation resistance: ≥100MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance: ≤20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙9T, UL94-V0
Insulator: Nylon9T, UL94-V0
- ◆接触针: 磷铜
Contact PIN: Phosphor bronze
- ◆焊片: 磷铜
Solder tab: Phosphor bronze

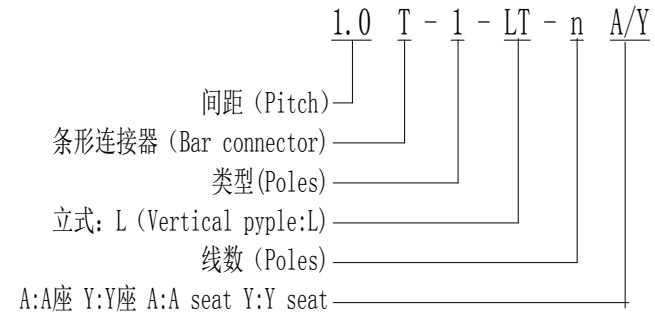

TOLERANCE:

X.	±XXX
.X	±0.20
.XX	±0.10
ANG.	



上海狮拓电子科技有限公司

产品名称:
产品料号:

THIRD ANGLE PROJECTION

签名 _____
日期 _____
审核 _____
日期 _____

客户确认

承认 _____ 日期 _____
 取回 _____ 日期 _____

1.0T-1-LT(SH)-NA