

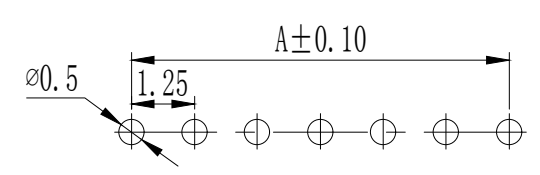
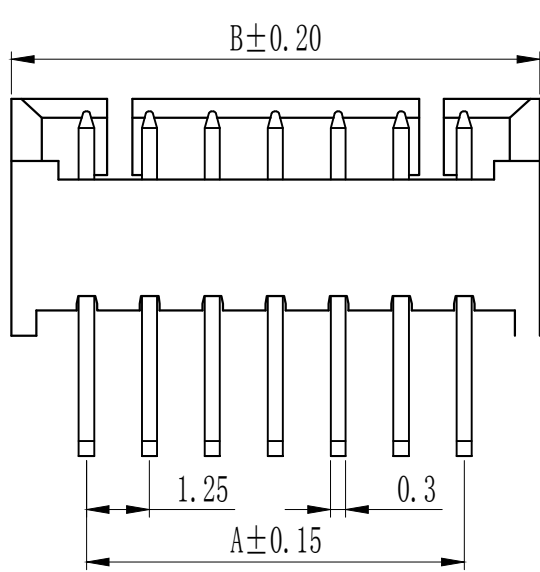


Pin数	尺寸A	尺寸B
2	1.25	4.25
3	2.50	5.50
4	3.75	6.75
5	5.00	8.00
6	6.25	9.25
7	7.50	10.50
8	8.75	11.75
9	10.00	13.00
10	11.25	14.25
11	12.50	15.50
12	13.75	16.75
13	15.00	18.00
14	16.25	19.25
15	17.50	20.50
16	18.75	21.75

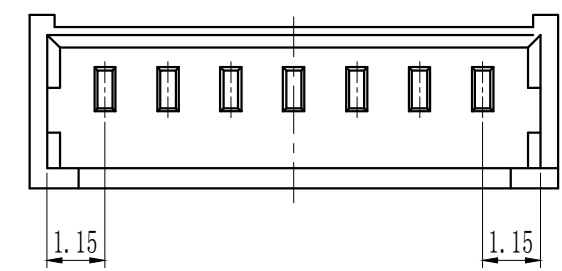

P.C.B LAYOUT

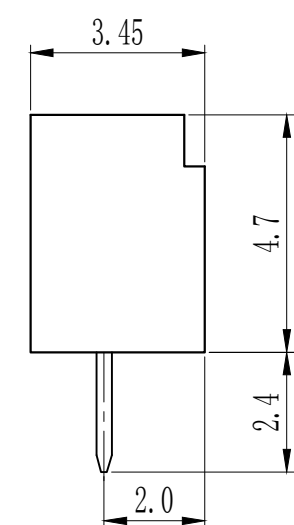

技术参数 SPECIFICATIONS

- ◆适用线规: AWG#28-#32  
Applicable Wire:AWG#28-#32
- ◆额定电压: AC, DC, 125V (有效值)  
Voltage rating: AC, DC, 125V(rms)
- ◆额定电流: 1.0A, AC, DC  
Current rating:1.0A, AC, DC
- ◆耐压值: 250V AC/minute  
Withstand voltage:250V AC/minute
- ◆工作温度: -40℃~+85℃  
Working Temp:-40℃~+85℃
- ◆绝缘电阻: ≥100MΩ  
Insulation resistance:≥100MΩ
- ◆接触电阻: ≤20mΩ  
Contact resistance:≤20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙6T, UL94-V0  
Insulator:Nylon46, UL94-V0
- ◆接触针: 磷铜  
Cobtact PIN:Phosphor bronze

TOLERANCE:
X. ±XXX
.X ±0.20
.XX ±0.10
ANG.

**STO** 上海狮拓电子科技有限公司

产品名稱: \_\_\_\_\_

产品料號: \_\_\_\_\_

THIRD ANGLE PROJECTION

簽名 _____	客戶確認
日期 _____	
審核 _____	<input type="checkbox"/> 承認 _____ 日期 _____
日期 _____	<input type="checkbox"/> 駁回 _____ 日期 _____

1.25T-1-NA