


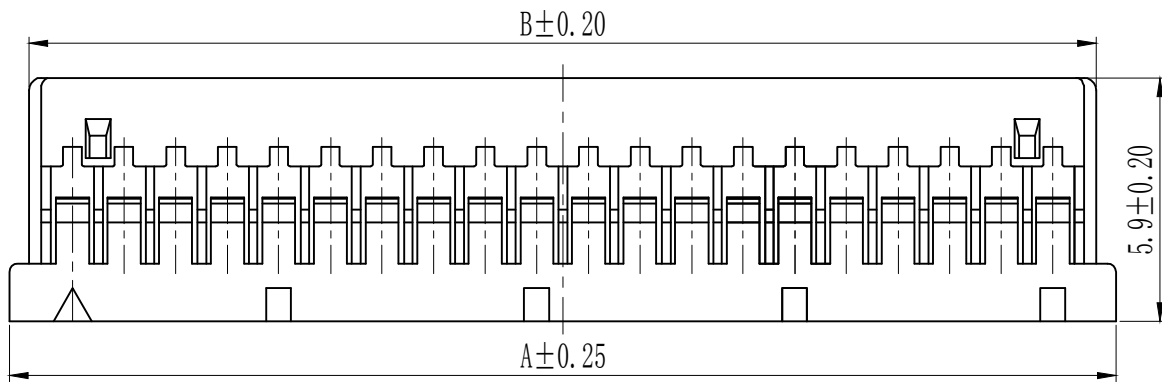


A  
B  
C  
D  
E  
F  
G  
H  
I  
J

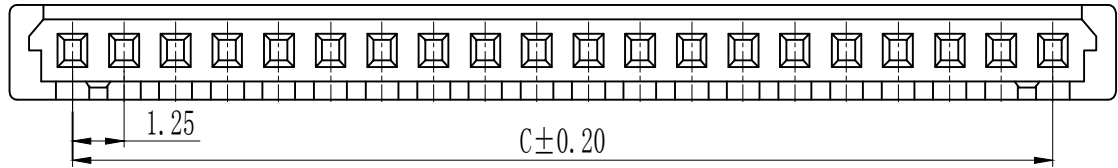

	P. N	A	B	C
20P	1.25T-5(DF14)-20Y	26.80	25.85	23.75
30P	1.25T-5(DF14)-30Y	39.30	38.35	36.25

技术参数 SPECIFICATIONS

- ◆ 适用线规: AWG#28~#32  
Applicable Wire: AWG#28~#32
- ◆ 额定电压: 150V DC, AC(rms)  
Rated voltage: 150V DC, AC(rms)
- ◆ 额定电流: 1A(AWG #28)  
Rated Current: 1A(AWG #28)
- ◆ 耐压值: 500V AC/minute  
Withstand voltage: 500V AC/min
- ◆ 工作温度: -25℃~+85℃  
Working Temp: -25℃~+85℃
- ◆ 绝缘电阻: 500MΩ Min  
Insulation resistance: ≥500MΩ
- ◆ 接触电阻: ≤30mΩ  
Contact resistance: ≤30mΩ

材料 MATERIAL

- ◆ 塑胶: 尼龙66 (Nylon66), UL94-V0

TOLERANCE:
X. ±XXX
.X ±0.20
.XX ±0.10
ANG.

**STO** 上海狮拓电子科技有限公司

产品名称: \_\_\_\_\_

产品料号: \_\_\_\_\_

THIRD ANGLE PROJECTION

客户确认

姓名: \_\_\_\_\_

日期: \_\_\_\_\_

审核: \_\_\_\_\_

日期: \_\_\_\_\_

承認 \_\_\_\_\_ 日期 \_\_\_\_\_

取回 \_\_\_\_\_ 日期 \_\_\_\_\_

1.25T-5(DF14)-NY