


Pin数	尺寸A	尺寸B	尺寸C
2	1.25	2.72	5.72
3	2.50	3.97	6.97
4	3.75	5.22	8.22
5	5.00	6.47	9.47
6	6.25	7.72	10.72
7	7.50	8.97	11.97
8	8.75	10.22	13.22
9	10.00	11.47	14.47
10	11.25	12.72	15.72
11	12.50	13.97	16.97
12	13.75	15.22	18.22
13	15.00	16.47	19.47
14	16.25	17.72	20.72
15	17.50	18.97	21.97
20	23.75	25.22	28.22
30	36.50	37.72	40.72

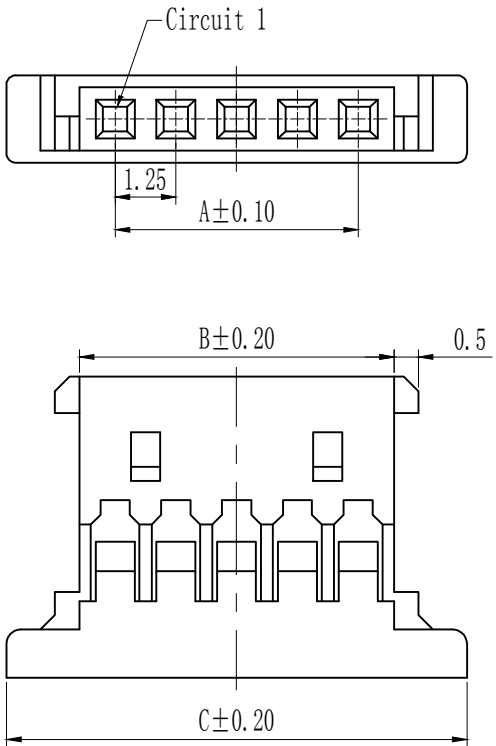

技术参数 SPECIFICATIONS

- ◆ 适用线规: AWG#28~#30
Applicable Wire: AWG#28~#30
- ◆ 额定电压: 125V DC, AC(rms)
Rated voltage: 125V DC, AC(rms)
- ◆ 额定电流: 1A (AWG #28)
Rated Current: 1A (AWG #28)
- ◆ 耐压值: 250V AC/minute
Withstand voltage: 250V AC/min
- ◆ 工作温度: -40°C ~ +85°C
Working Temp: -40°C ~ +85°C
- ◆ 绝缘电阻: 500MΩ Min
Insulation resistance: ≥500MΩ
- ◆ 接触电阻: ≤20mΩ
Contact resistance: ≤20mΩ

材料 MATERIAL

- ◆ 胶壳: 尼龙66, UL94-V0
Housing: Nylon66, UL94-V0

TOLERANCE:
X. ±XXX
.X ±0.20
.XX ±0.10
ANG.

	上海狮拓电子科技有限公司	
	产品名称: _____ 产品料号: _____	THIRD ANGLE PROJECTION

签名 _____	客户确认
日期 _____	
审核 _____	
日期 _____	
<input type="checkbox"/> 承认 _____ 日期 _____ <input type="checkbox"/> 驳回 _____ 日期 _____	

1.25T-4-NY