

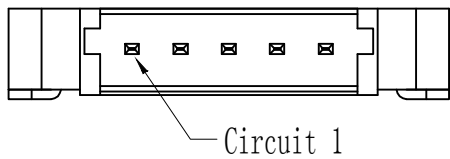
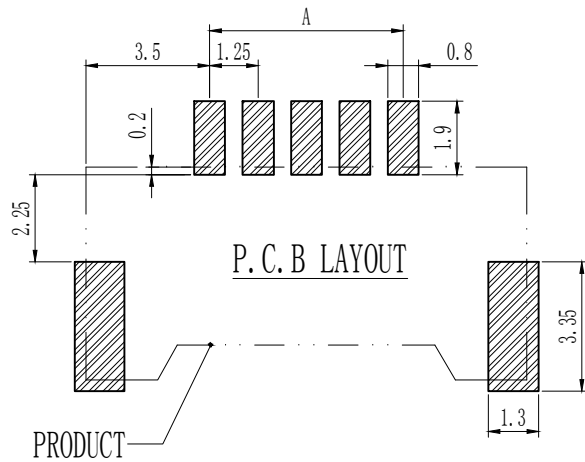
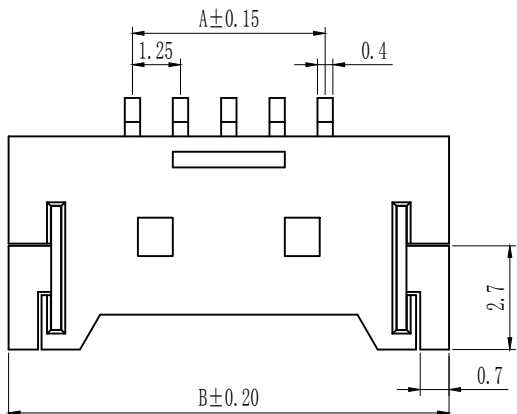
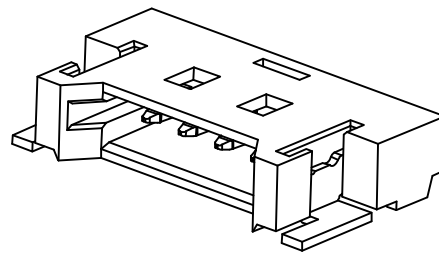



Pin数	尺寸A	尺寸B
4	3.75	10.15
5	5.00	11.40
6	6.25	12.65
7	7.50	13.90
8	8.75	15.15
9	10.00	16.40
10	11.25	17.65
11	12.50	18.90
12	13.75	20.15
13	15.00	21.40
14	16.25	22.65
15	17.50	23.90
16	18.75	25.15
17	20.00	26.40
18	21.25	27.65
19	22.50	28.90
20	23.75	30.15
21	25.00	31.40
22	26.25	32.65
23	27.50	33.90
24	28.75	35.15
25	30.00	36.40
26	31.25	37.65
27	32.50	38.90



- 技术参数 SPECIFICATIONS
- ◆极数: 2~30 Poles:2~30
  - ◆额定电压: AC, DC, 125V (有效值)  
Voltage rating: AC, DC, 125V(rms)
  - ◆额定电流: 1.0A, AC, DC  
Current rating:1.0A, AC, DC
  - ◆耐压值: 500V AC/minute  
Withstand voltage:500V AC/minute
  - ◆工作温度: -25℃~+85℃  
Working Temp:-25℃~+85℃
  - ◆绝缘电阻: ≥100MΩ  
Insulation resistance:≥100MΩ
  - ◆接触电阻: ≤20mΩ  
Contact resistance:≤20mΩ

- 材料 MATERIAL
- ◆绝缘体: 尼龙9T, UL94-V0  
Insulator:Nylon46, UL94-V0
  - ◆接触针: 黄铜  
Cobtact PIN:Brass
  - ◆焊片: 黄铜  
Solder tab:Brass

TOLERANCE:

X.	±XXX
.X	±0.20
.XX	±0.10
ANG.	

**STO** 上海狮拓电子科技有限公司

产品名稱: \_\_\_\_\_

产品料號: \_\_\_\_\_

THIRD ANGLE PROJECTION

簽名 \_\_\_\_\_

日期 \_\_\_\_\_

審核 \_\_\_\_\_

日期 \_\_\_\_\_

客戶確認

承認 \_\_\_\_\_ 日期 \_\_\_\_\_

駁回 \_\_\_\_\_ 日期 \_\_\_\_\_

1.25T-4-NAW