




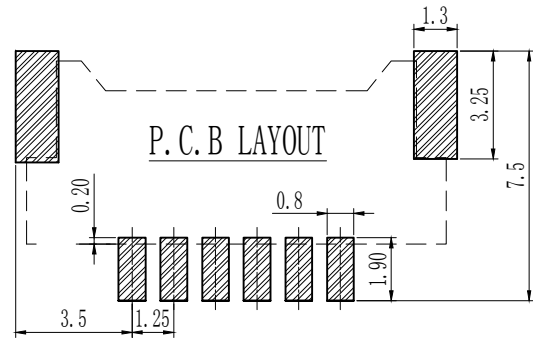
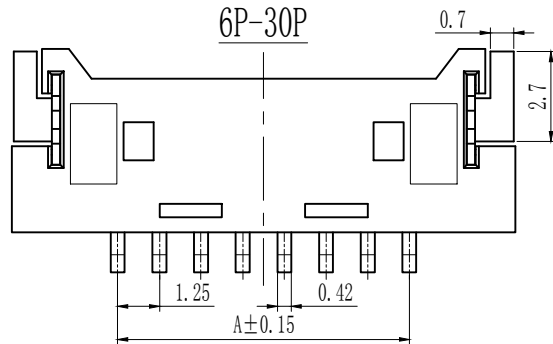


A
B
C
D
E
F
G
H
I

Pin数	尺寸A	尺寸B
2	1.25	7.65
3	2.50	8.90
4	3.75	10.15
5	5.00	11.40
6	6.25	12.65
7	7.50	13.90
8	8.75	15.15
9	10.00	16.40
10	11.25	17.65
11	12.50	18.90
12	13.75	20.15
13	15.00	21.40
14	16.25	22.65
15	17.50	23.90
20	23.75	28.00
30	36.25	42.65

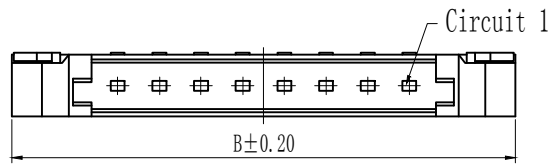

技术参数 SPECIFICATIONS

- ◆ 适用线规: AWG#28-#30
Applicable Wire: AWG#28-#30
- ◆ 额定电压: AC, DC, 125V (有效值)
Voltage rating: AC, DC, 125V (rms)
- ◆ 额定电流: 1.0A, AC, DC (AWG#28)
Current rating: 1.0A, AC, DC (AWG#28)
- ◆ 耐压值: 250V AC/minute
Withstand voltage: 250V AC/minute
- ◆ 工作温度: -40°C ~ +85°C
Working Temp: -40°C ~ +85°C
- ◆ 绝缘电阻: ≥500MΩ
Insulation resistance: ≥500MΩ
- ◆ 接触电阻: ≤20mΩ
Contact resistance: ≤20mΩ

材料 MATERIAL

- ◆ 绝缘体: 尼龙9T, UL94-V0
Insulator: Nylon9T, UL94-V0
- ◆ 接触针: 黄铜
Contact PIN: Brass
- ◆ 焊片: 黄铜
Solder tab: Brass

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



上海狮拓电子科技有限公司

产品名称:

产品料号:

THIRD ANGLE PROJECTION



签名 _____

日期 _____

审核 _____

日期 _____

客户确认

承认 _____ 日期 _____

取回 _____ 日期 _____

1.25T-4-NA(1.85)