
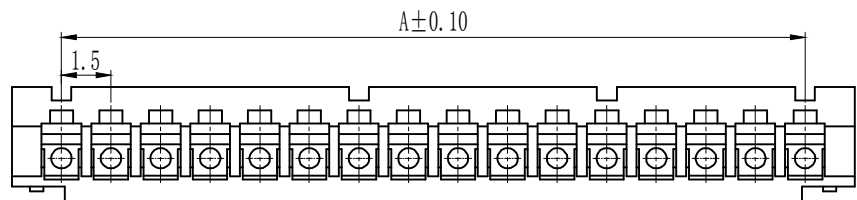



A  
B  
C  
D  
E  
F  
G  
H  
I

Pin数	尺寸A	尺寸B	尺寸C
2	1.50	3.40	4.50
3	3.0	4.9	6.0
4	4.50	6.40	7.50
5	6.00	7.90	9.00
6	7.50	9.40	10.50
7	9.00	10.90	12.00
8	10.50	12.40	13.50
9	12.00	13.90	15.00
10	13.50	15.40	16.50
11	15.00	16.90	18.00
12	16.50	18.40	19.50
13	18.00	19.90	21.00
14	19.50	21.40	22.55
15	21.00	22.90	24.00
16	22.50	24.40	25.50

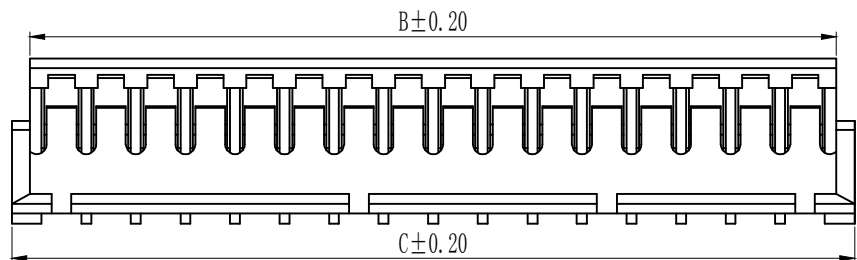

技术参数 SPECIFICATIONS

- ◆极数: 2-16 Poles:2-16
- ◆适用线规: AWG#28~#32  
Applicable Wire: AWG#28~#32
- ◆额定电压: 50V DC, AC(rms)  
Rated voltage: 50V DC, AC(rms)
- ◆额定电流: 1A(AWG #26)  
Rated Current: 1A(AWG #26)
- ◆耐压值: 500V AC/minute  
Withstand voltage: 500V AC/min
- ◆工作温度: -25°C~+85°C  
Working Temp:-25°C~+85°C
- ◆绝缘电阻: 500MΩ Min  
Insulation resistance:  $\geq 500M\Omega$
- ◆接触电阻:  $\leq 20m\Omega$   
Contact resistance:  $\leq 20m\Omega$

材料 MATERIAL

- ◆塑胶: 尼龙  
66 (Nylon66), UL94-V0

TOLERANCE:

X.	$\pm XXX$
.X	$\pm 0.20$
.XX	$\pm 0.10$
ANG.	



上海狮拓电子科技有限公司

产品名称:  
产品料号:

THIRD ANGLE PROJECTION

签名 \_\_\_\_\_  
日期 \_\_\_\_\_  
审核 \_\_\_\_\_  
日期 \_\_\_\_\_

客户确认

承认 \_\_\_\_\_ 日期 \_\_\_\_\_  
 取回 \_\_\_\_\_ 日期 \_\_\_\_\_

ZH1.5T-1-NY