
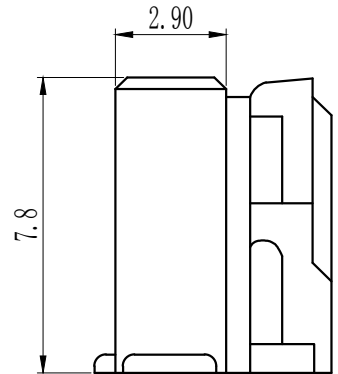
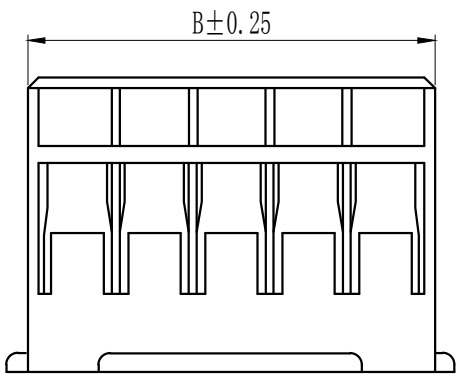


Pin数	尺寸A	尺寸B
2	6.00	4.50
3	4.00	6.50
4	6.00	8.50
5	8.00	10.50
6	10.00	12.50
7	12.00	14.50
8	14.00	16.50
9	16.00	18.50
10	18.00	20.50
11	20.00	22.50
12	22.00	24.50
13	24.00	26.50
14	26.00	28.50
15	28.00	30.50
16	30.00	32.50

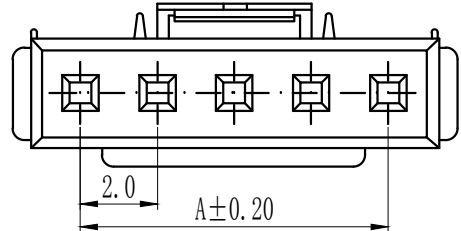

技术参数 SPECIFICATIONS

- ◆间距: 2.0 Pitch:2.0
- ◆适用线规: AWG#24-#30
Applicable Wire:AWG#24-#30
- ◆额定电压: AC, DC, 100V (有效值)
Voltage rating: AC, DC, 100V(rms)
- ◆额定电流: 2A, AC, DC (AWG#24)
Current rating:2A, AC, DC (AWG#24)
- ◆耐压值: 800V AC/minute
Withstand voltage:800V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤10mΩ
Contact resistance:≤10mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-V2
Insulator:Nylon66 UL94-V2

TOLERANCE:
X. ±XXX
.X ±0.20
.XX ±0.10
ANG.

	上海狮拓电子科技有限公司	
	产品名称: _____ 产品料号: _____	THIRD ANGLE PROJECTION

签名 _____	客户确认
日期 _____	
审核 _____	
日期 _____	
	<input type="checkbox"/> 承認 _____ 日期 _____ <input type="checkbox"/> 駁回 _____ 日期 _____

PHS-NY