

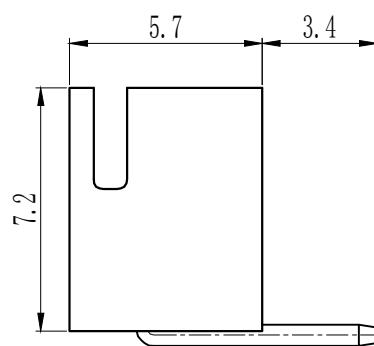
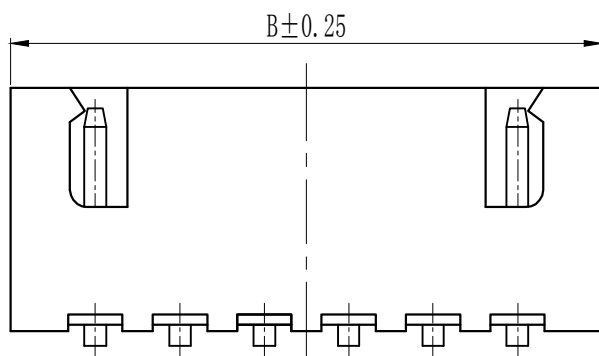


Pin数	尺寸A	尺寸B
2	2.50	7.50
3	5.0	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00

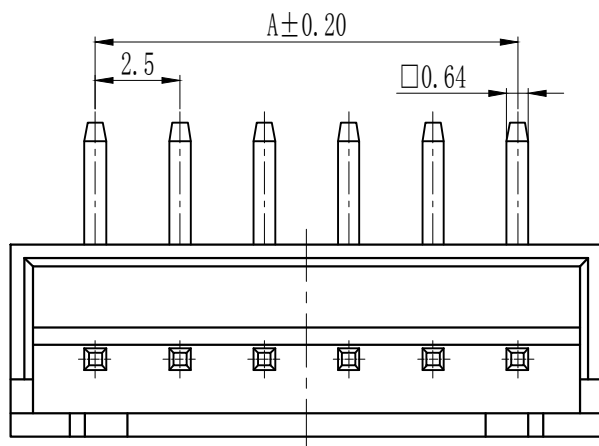

P. C. B LAYOUT

技术参数 SPECIFICATIONS

- ◆间距: 2.5 Pitch:2.5
- ◆适用线规: AWG#22-#28  
Applicable Wire:AWG#22-#28
- ◆额定电压: AC,DC, 250V (有效值)  
Voltage rating: AC, DC, 250V(rms)
- ◆额定电流: 2.5A, AC, DC (AWG#22)  
Current rating:2.5A, AC, DC (AWG#22)
- ◆耐压值: 800V AC/minute  
Withstand voltage:800V AC/minute
- ◆工作温度: -25°C~+85°C  
Working Temp:-25°C~+85°C
- ◆绝缘电阻:  $\geq 1000M\Omega$   
Insulation resistance: $\geq 1000M\Omega$
- ◆接触电阻:  $\leq 10m\Omega$   
Contact resistance: $\leq 10m\Omega$

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-V0  
Insulator:Nylon66 UL94-V0
- ◆接触针:黄铜  
Contact PIN:Brass

TOLERANCE:

X.  $\pm XXX$

.X  $\pm 0.20$

.XX  $\pm 0.10$

ANG.



上海狮拓电子科技有限公司

产品名称:

产品料号:

THIRD ANGLE PROJECTION



签名 \_\_\_\_\_

日期 \_\_\_\_\_

审核 \_\_\_\_\_

日期 \_\_\_\_\_

客户确认

承認 \_\_\_\_\_ 日期 \_\_\_\_\_

取回 \_\_\_\_\_ 日期 \_\_\_\_\_

XH-NAW