

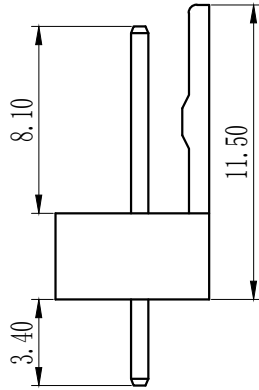
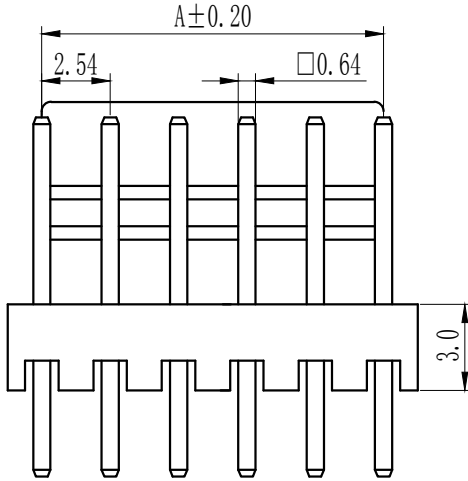


Pin数	尺寸A	尺寸B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80

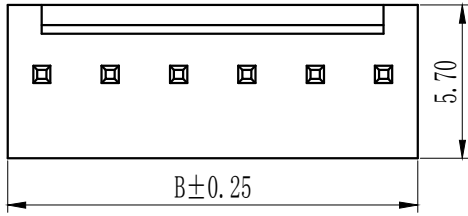

P. C. B LAYOUT

技术参数 SPECIFICATIONS

- ◆间距: 2.54 Pitch:2.54
- ◆适用线规: AWG#22-#28  
Applicable Wire:AWG#22-#28
- ◆额定电压: AC,DC, 250V (有效值)  
Voltage rating: AC,DC, 250V(rms)
- ◆额定电流: 3.0A, AC, DC  
Current rating:3.0A, AC, DC
- ◆耐压值: 1000V AC/minute  
Withstand voltage:1000V AC/minute
- ◆工作温度: -25℃~+85℃  
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥1000MΩ  
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤20mΩ  
Contact resistance:≤20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0  
Insulator:Nylon66 UL94-0
- ◆接触针: 磷青铜  
Contact PIN: Phosphor bronze

TOLERANCE:

X.	±XXX
.X	±0.20
.XX	±0.10
ANG.	



上海狮拓电子科技有限公司

产品名称:

产品料号:

THIRD ANGLE PROJECTION



签名 \_\_\_\_\_  
日期 \_\_\_\_\_  
审核 \_\_\_\_\_  
日期 \_\_\_\_\_

客户确认

承認 \_\_\_\_\_ 日期 \_\_\_\_\_  
 取回 \_\_\_\_\_ 日期 \_\_\_\_\_

2510-NA