
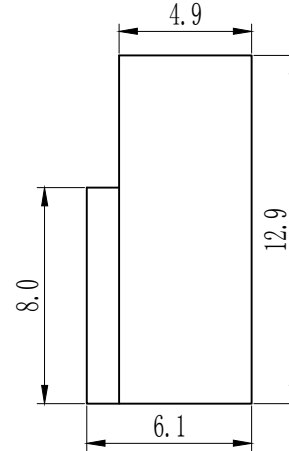
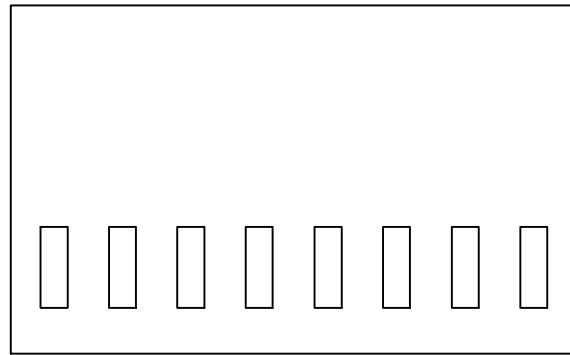


Pin数	尺寸A	尺寸B
2	2.54	5.80
3	5.08	8.34
4	7.62	10.88
5	10.16	13.42
6	12.70	15.96
7	15.24	18.50
8	17.78	21.04
9	20.32	23.58
10	22.86	26.12
11	25.40	28.66
12	27.94	31.20
13	30.48	33.74
14	33.02	36.28
15	35.56	38.82
16	38.10	41.36
17	40.64	43.90
18	43.18	46.44
19	45.72	48.98
20	48.26	51.52

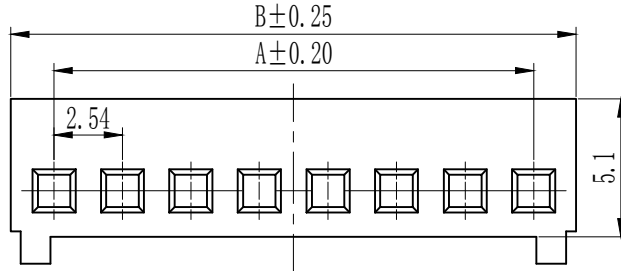

技术参数 SPECIFICATIONS

- ◆间距: 2.54 Pitch:2.54
- ◆适用线规: AWG#22-#28
Applicable Wire:AWG#22-#28
- ◆额定电压: AC,DC, 250V (有效值)
Voltage rating: AC,DC, 250V(rms)
- ◆额定电流: 3.0A, AC, DC
Current rating:3.0A, AC, DC
- ◆耐压值: 1000V AC/minute
Withstand voltage:1000V AC/minute
- ◆工作温度: -25℃~+85℃
Working Temp:-25℃~+85℃
- ◆绝缘电阻: ≥1000MΩ
Insulation resistance:≥1000MΩ
- ◆接触电阻: ≤20mΩ
Contact resistance:≤20mΩ

材料 MATERIAL

- ◆绝缘体: 尼龙66, UL94-0
Insulator:Nylon66 UL94-0

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.



上海狮拓电子科技有限公司

产品名称:

产品料号:

THIRD ANGLE PROJECTION



签名 _____

日期 _____

审核 _____

日期 _____

客户确认

承认 _____ 日期 _____

驳回 _____ 日期 _____

2510-NY