
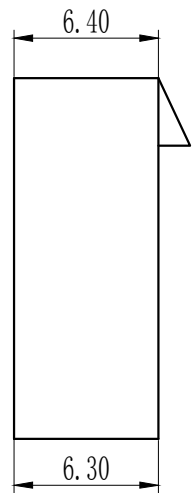
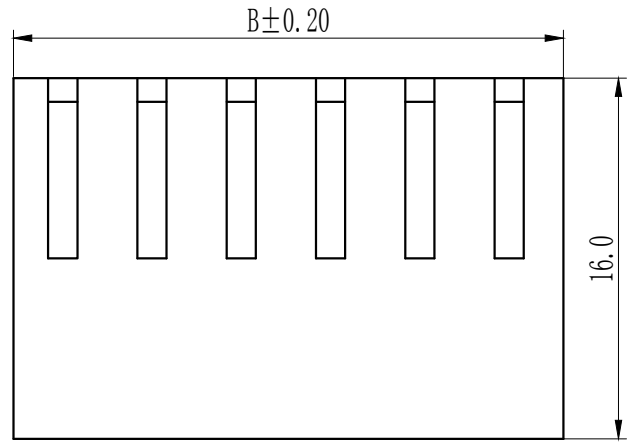


A  
B  
C  
D  
E  
F  
G  
H  
I

Pin数	尺寸A	尺寸B
2	5.08	10.08
3	10.16	15.16
4	15.24	20.24
5	20.32	25.32
6	25.40	30.40
7	30.48	35.48
8	35.56	40.56
9	40.64	45.64
10	45.72	50.72

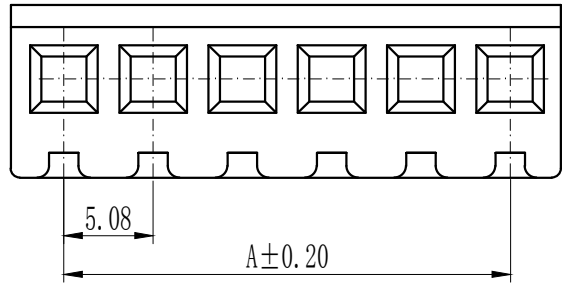

技术参数 SPECIFICATIONS

- ◆ 间距: 5.08 Pitch:5.08
- ◆ 适用线规: AWG#22-#28  
Applicable Wire:AWG#22-#28
- ◆ 额定电压: AC, DC, 250V (有效值)  
Voltage rating: AC, DC, 250V (rms)
- ◆ 额定电流: 7A, AC, DC (AWG#24)  
Current rating:7A, AC, DC (AWG#24)
- ◆ 耐压值: 1500V AC/minute  
Withstand voltage:1500V AC/minute
- ◆ 工作温度: -25℃~+85℃  
Working Temp:-25℃~+85℃
- ◆ 绝缘电阻: ≥1000MΩ  
Insulation resistance:≥1000MΩ
- ◆ 接触电阻: ≤20mΩ  
Contact resistance:≤20mΩ

材料 MATERIAL

- ◆ 绝缘体: 尼龙66, UL94V-2  
Insulator:Nylon66 UL94V-2

TOLERANCE:
X. ±XXX
.X ±0.20
.XX ±0.10
ANG.

## 上海狮拓电子科技有限公司

产品名称: \_\_\_\_\_

产品料号: \_\_\_\_\_

THIRD ANGLE PROJECTION

签名: _____ 日期: _____ 审核: _____ 日期: _____	客户确认	
	<input type="checkbox"/> 承认 _____ 日期 _____	
	<input type="checkbox"/> 取回 _____ 日期 _____	

5.08-NY