
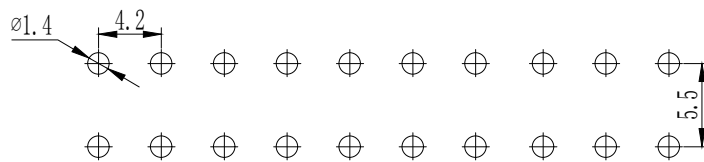

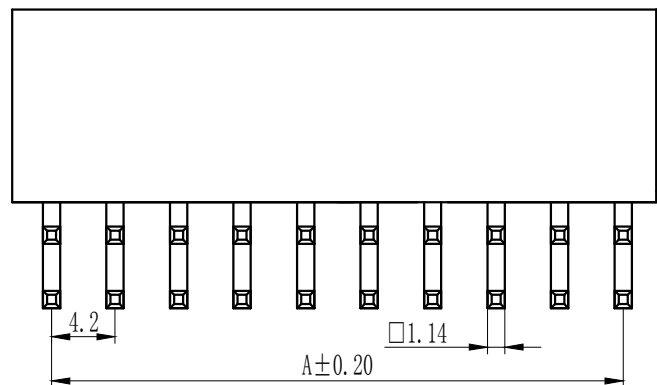


Pin数	尺寸A	尺寸B
2	4.20	10.25
3	8.40	14.45
4	12.60	18.65
5	16.80	22.85
6	21.00	27.05
7	25.20	31.25
8	29.40	35.45
9	33.60	39.65
10	37.80	43.85
11	42.00	48.05
12	46.20	52.25

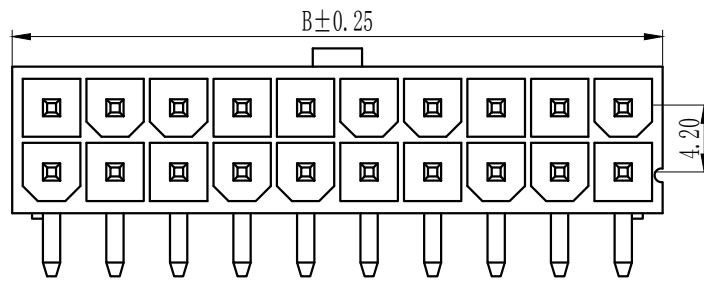

P. C. B LAYOUT

技术参数 SPECIFICATIONS

- ◆ 间距: 4.2 Pitch:4.2
- ◆ 适用线规: AWG#22-#28  
Applicable Wire:AWG#22-#28
- ◆ 额定电压: AC,DC, 250V (有效值)  
Voltage rating: AC,DC, 250V(rms)
- ◆ 额定电流: 5A, AC, DC  
Current rating:5A, AC, DC
- ◆ 耐压值: 1500V AC/minute  
Withstand voltage:1500V AC/minute
- ◆ 工作温度: -25℃~+85℃  
Working Temp:-25℃~+85℃
- ◆ 绝缘电阻:  $\geq 1000M\Omega$   
Insulation resistance: $\geq 1000M\Omega$
- ◆ 接触电阻:  $\leq 20m\Omega$   
Contact resistance: $\leq 20m\Omega$

材料 MATERIAL

- ◆ 绝缘体: 尼龙66, UL94-2  
Insulator:Nylon66 UL94-2
- ◆ 接触针: 磷青铜  
Contact PIN: Phosphor Bronze

TOLERANCE:

X.  $\pm XXX$

.X  $\pm 0.20$

.XX  $\pm 0.10$

ANG.



上海狮拓电子科技有限公司

产品名称:

产品料号:

THIRD ANGLE PROJECTION



签名 \_\_\_\_\_

日期 \_\_\_\_\_

审核 \_\_\_\_\_

日期 \_\_\_\_\_

客户确认

承认 \_\_\_\_\_ 日期 \_\_\_\_\_

取回 \_\_\_\_\_ 日期 \_\_\_\_\_

5557-NAW