
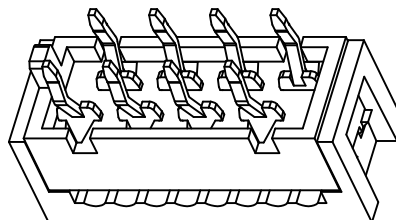




R O H S

ST0-C0-133




Specifications:

- Voltage rating: 500V AC/DC
- Current rating: 1A AC/DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -40° C ~ +105° C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤20mΩ
- Plastic material: PBT UL 94V-0
- Terminal material: Phosphor Bronze
- Finish: Tin-Plated

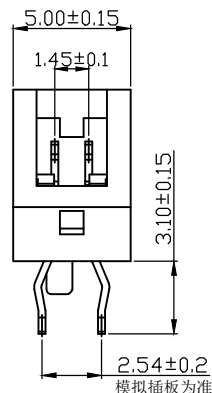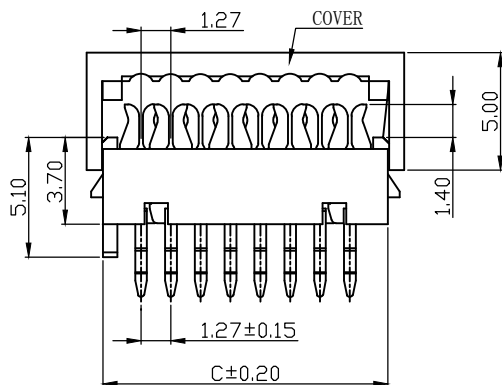

1127 B XX I 5 9 00

- ①Series:
- ②Category: W-Wire B-Board
- ③Circuit number: XX PIN
- ④Plastic material and color:
I-Purplish red PBT
- ⑤Terminal material & finish:
5-Phosphor bronze bright tin plating
- ⑥Finish specification: 9 - 7 0 ~ 1 2 0 U "
- ⑦Special code:

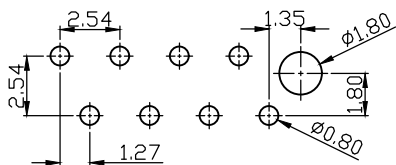

Recommended P.C.B Layout (Top Side)
(PCB Board Tolerance ±0.05)

Poles	Dimensions			Poles	Dimensions		
	A	B	C		A	B	C
04	8.45	2.54	7.10	16	23.69	17.78	22.34
06	10.99	5.08	9.64	18	26.23	20.32	24.88
08	13.53	7.62	12.18	20	28.77	22.86	27.42
10	16.07	10.16	14.72	22	31.31	25.40	29.96
12	18.61	12.70	17.26	24	33.85	27.94	32.50
14	21.15	15.24	19.80	26	36.39	30.48	35.04

TOLERANCE:

X. ±XXX

X ±0.20

.XX ±0.10

ANG.



上海狮拓电子科技有限公司

产品名称:

产品料号:

THIRD ANGLE PROJECT

签名 _____

日期 _____

审核 _____

日期 _____

客户确认

承认 _____ 日期 _____

驳回 _____ 日期 _____

1127BXXI5900